

THE JEDLIK LABORATORIES  
RESEARCH ACTIVITY – AN OVERVIEW  
2015

FACULTY OF INFORMATION TECHNOLOGY AND BIONICS  
PÁZMÁNY PÉTER CATHOLIC UNIVERSITY



**THE JEDLIK LABORATORIES  
RESEARCH ACTIVITY – AN OVERVIEW  
2015**

FACULTY OF INFORMATION TECHNOLOGY AND BIONICS

PÁZMÁNY PÉTER CATHOLIC UNIVERSITY



PÁZMÁNY UNIVERSITY *e*PRESS  
BUDAPEST 2015

© PPKE Információs Technológiai és Bionikai Kar, 2015

Kiadja a Pázmány Egyetem eKiadó

Felelős kiadó

A.R.D. Szuromi Szabolcs Anzelm O. Praem.  
a Pázmány Péter Katolikus Egyetem rektora

## **PREFACE**

The present document intends to give a brief but complete overview on the research activity of the Jedlik Laboratories of the Faculty of Information Technology and Bionics, at Pázmány Péter Catholic University. The Jedlik Laboratories are formed around the research activities of the Faculty professors and PhD students of the Multidisciplinary Doctoral School. These 30+50 researchers on the field of information technology and bionics may exhibit a large research capacity if they are working in a well-focused manner. It was recognized by the title “Research Faculty” given by the Hungarian state in 2013.

The research descriptions of our laboratories are completed by some relevant publications as well.

This document contains the original introduction of Prof Tamás Roska (1940-2014), founding dean of the Faculty and first director of the Jedlik Laboratories. I try to do my best to follow his research ideas in the life of our Faculty.

Budapest, 25 November, 2014

Péter Szolgay  
Director of Jedlik Labs



## INTRODUCTION

In 1635, Péter Pázmány, Archbishop of Esztergom, Primate of Hungary, an outstanding preacher and the renewer of the Hungarian language, established a University that is the oldest today in Hungary. Until 1950, under various names, at that time as the Pázmány Péter University of Sciences (Pázmány Péter Tudományegyetem) has been the most important and oldest University in Hungary. In 1950, the Pázmány University was split into three parts, the Medical School, the smallest part keeping the name of Pázmány (Theology, philosophy), and the rest as the Eötvös Loránd University of Sciences.

After the collapse of the communist system, in 1991, the Pázmány University started to reextend. Today, it is a University with 8 000 students doing education and research in almost all fields of sciences: humanities, social sciences, law, and theology, as well as major fields in science and technology. Its Multidisciplinary Institute of Advanced Studies has been recently established (the Pázmány Institute) and it is a University of national excellence in Hungary.

The strong ties with the Semmelweis Medical University have been developed during the last 10 years, and last year a special alliance between the three Pázmány rooted Universities had been established in the fields of research.

On July 1, 1998, the Faculty of Information Technology was established, as a strongly research oriented Faculty, teaching and doing research in electronic and computer engineering and later on in bionic engineering. Presently, the Faculty is accredited to give doctoral degrees and habilitation in electrical engineering, information technology, and biology. Right from the beginning, may be the first in Europe, a systematic study and a synergy was developed with neurosciences, teamed up also with a few outstanding neuroscientists from the Hungarian Academy of Sciences. Finally, establishing the undergraduate curriculum in Molecular Bionics five years ago in collaboration with the Semmelweis University, the first of this kind in Europe, the special character of our Faculty has been developed. Actually, Bionics is defined by four disciplinary pillars: molecular biology, neuroscience, electromagnetics and photonics, and computer engineering.

We have started in a Department system, without the classical continental chair system, and the research laboratories forming a unit called A. Jedlik R&D Laboratories or briefly, Jedlik Laboratories were also established. Each laboratory, one of the 22 today, offers some experimental facilities, many of them with high-end technologies. In addition, during the last 10 years we have developed a close relationship with the Semmelweis Medical University forming already 2 joint centers and 4 joint research projects. A special relationship exists from the beginning with the Research Institute of Experimental Medicine of the Hungarian Academy of Sciences (HAS), our neuroscience teaching and research is based mainly by Professors with joint affiliation. Joint affiliation has also been started last year with five professors at various clinical departments of the Semmelweis University.

In addition, we have strategic partnerships with five other institutes of the HAS, as well as developing partnerships with many companies.

In this booklet, we intended to give a brief, however, quite complete picture about the activities of the Jedlik Laboratories. The details of the projects are published in each year in our Annual Research Reports.

Special thanks are due to many individuals for their generous support. First of all, to the Rector of our University in 1998, Professor Péter Erdő, by founding this Faculty, and making it to become a research faculty. We are grateful to the many outstanding colleagues joining to this intellectual adventure as professors. Special thanks are due to the directors of five Institutes of the HAS who generously offered the joint appointments of some of their excellent researchers and their laboratory use at the beginning, as well as to the three Rectors of the Semmelweis Medical University. Many seminal collaborations developed during the long tenure of Rector Professor Tivadar Tulassay. Our present Rector, Professor Szabolcs Szuromi, our Dean Professor Péter Szolgay, and Pro-Dean Professor Judit Nyékyné Gaizler provided extraordinary help in establishing and supporting the Jedlik Laboratories, and providing for a lifestyle of a research university.

The hard and dedicated works of the many colleagues of our Faculty in the Jedlik Laboratories as well as of the many outstanding graduate students are the cornerstones of the success.

Now, we are heading to a major new project, by building a Bionic Innovation Center, for serving as a catalyst for the Hungarian Bionics Industry. This is being established now, with the generous support of the Government of Hungary. This specially funded National Innovation Center, the first of its kind in Central-Eastern Europe will exploit the many young talents who are receiving their degrees in the Bionics curricula.

May 15, 2013

Tamás Roska  
Director of the Jedlik Laboratories

## TABLE OF CONTENTS

<b>Introduction</b> .....	5
<b>Preface</b> .....	7
<b>The 22 labs in the Jedlik Laboratories</b>	
1. Simulations of electromagnetic fields, and field-matter interactions ( <i>Árpád I. Csurgay</i> ) .....	11
2. Cellular wave computing and spatial-temporal algorithms ( <i>Péter Szolgay, Barnabás Garay, András Horváth, Ákos Zarándy, Miklós Koller, Tamás Zsedrovits</i> ) .....	15
3. Virtual and physical machines with mega-processor chips ( <i>Péter Szolgay, András Kiss, Zoltán Nagy, Csaba Nemes, István Reguly</i> ) .....	17
4. Natural language processing ( <i>Gábor Prószéky, Bálint Sass, Márton Miháltz</i> ) .....	21
5. Discovery research in neurobiology ( <i>Tamás Freund, Zsolt Liposits, Imre Kalló, Szabolcs Káli, Barbara Vida</i> ) .....	23
6. Bioinformatics and self-organization ( <i>Sándor Pongor, Zsolt Gelencsér, Dóra Bihary</i> ) .....	25
7. Structural bioinformatics & proteomics ( <i>Zoltán Gáspári</i> ) .....	27
8. Analysis and control of dynamical systems ( <i>Gábor Szederkényi, Dávid Csercsik, János Rudan</i> ) .....	29
9. Electrophysiology - invasive and non-invasive bionic interfaces ( <i>György Karmos, István Ulbert</i> ) .....	31
10. Multi-photon microscopy ( <i>Balázs Rózsa</i> ) .....	33
11. Programmable optics ( <i>Szabolcs Tőkés, Kristóf Iván</i> ) .....	37
12. Movement rehabilitation ( <i>József Laczkó, Péter Szolgay</i> ) .....	39
13. Ultrasound bionic technologies ( <i>Miklós Gyöngy</i> ) .....	43
14. Microfluidics and polimer opto-electronic technologies ( <i>Kristóf Iván, András J. Laki</i> ) .....	45
15. Experimental mathematics ( <i>Barnabás Garay, Miklós Koller, Miklós Ruszinkó</i> ) .....	47
16. Software defined electronics and virtual instrumentation ( <i>Géza Kolumbán</i> ) .....	49
17. Artificial intelligence and spatial-temporal semantics ( <i>Kristóf Karacs</i> ) .....	53
18. Sensing-actuating robotics ( <i>György Cserey</i> ) .....	55
19. Mobile sensing networks ( <i>András Oláh, Kálmán Tornai, István Reguly</i> ) .....	57
20. Microelectronic systems and integrated circuits ( <i>Ferenc Kovács, Péter Földesy</i> ) .....	59
21. Programming languages and software technology ( <i>Judit Nyékyné Gaizler, István Vető, Gergely Feldhoffer</i> ) .....	61
22. Data management, data mining and media technologies for communities ( <i>Gergely Lukács, György Takács</i> ) .....	63

## **Joint Centers with the Semmelweis University**

- A. Hungarian Bionic Vision Center (*Kristóf Karacs, Ákos Kusnyerik*).....67
- B. Center of Neuromodulation (*Lóránd Erőss, Dániel Bereczky*).....69

## **Various joint Research projects with the Semmelweis University**

- I. On-line personalized genetic analysis for tumors (*Sándor Pongor, Balázs Győrffy*).....75
- II. Optically controlled self organizing amyloid network (*Miklós Kellermayer, Szabolcs Osváth, Kristóf Iván*) .....77
- III. Ultrasound in dermatology (*Sarolta Kárpáti, Miklós Gyöngy, Klára Szalay*) .....79
- IV. DIGICON (Digital medical consultation) (*Gábor Prószéky, János Németh*) .....81

# 1. SIMULATIONS OF ELECTROMAGNETIC FIELDS, AND FIELD MATTER INTERACTIONS

ÁRPÁD I. CSURGAY, Professor

Graduate students: ÁDÁM FEKETE, IMRE JUHÁSZ, ÁDÁM PAPP

The Laboratory provides simulation services and performs case studies on the Interactions of Matter with Electromagnetic Fields (EMAG)

The services enable to model and simulate EMAG fields in cavities, wave-guides, the radiation of antennas, and the interaction of electromagnetic radiation with materials with complex structures. Complex material characteristics (energy levels, spectra, polarization) can be studied by molecular dynamics simulation (GAMESS, Gaussian). The simulation services are helpful in understanding and design of


- i. fluorescent material imaging (microscopy),
- ii. metamaterials, photonic crystals,
- iii. ferromagnetic domain structures and domain
- iv. spin-waves in nanomagnetic structures
- v. ferromagnetic domain structures

In order to illustrate the field-matter interaction studies we selected four already published case studies, namely (I) Simulations of the fluorescent responses in two-photon microscopes; (II) Micromagnetic simulations of spin-wave devices; (III) Nanomagnetic logic simulations; (IV) Spin-wave based realizations of optical computing primitives.

## (I) SIMULATION OF FLUORESCENCE AND PHOTOBLEACHING IN TWO-PHOTON EXCITED SAMPLES [1] [2]

In microscopy, the phenomenon of fluorescence is used to identify and localize molecules. In order to gain accurate information on the sample (e.g. the spatial distribution or the diffusion properties of the fluorophore molecules) by fluorescent techniques, one has to know as precisely as possible where the detected fluorescent photons originate from. In other words, the knowledge of the actual fluorescence profile is crucial. The fluorescence profile is influenced among others by photobleaching, that is, photochemical processes due to which the fluorophore molecules lose their photon emitting ability. To investigate the fluorescent profile in two-photon excited samples together with its time-evolution, we developed a simulator program. Our simulation-based results revealed how the illumination laser power, diffusion, and the rate of various state transitions of the fluorophore affect fluorescence. We revealed the unusual spatial profile of fluorescence which evolves as photobleaching progresses: a “dark hole” appears at the focus and the most photons are emitted from an ellipsoid around it. These findings should be useful in image reconstruction, in analysis of data gained by various fluorescent techniques or in super-resolution microscopy. Furthermore,


our model gives an insight how the operating parameters of the measurement device or the properties of the fluorophore affect fluorescent measurements.

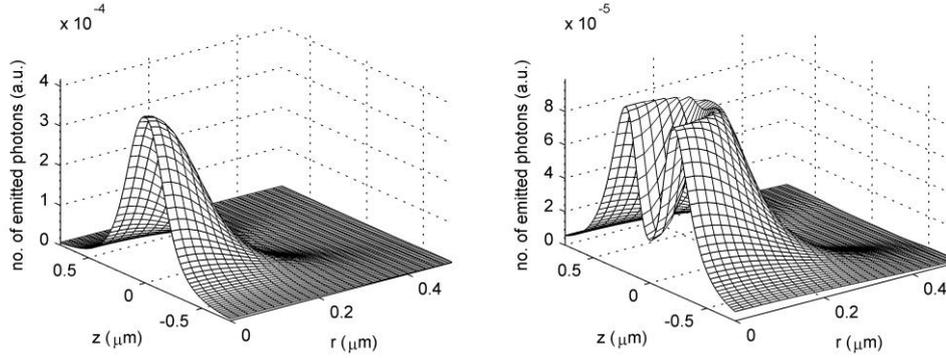

**Fig. 1** The spatial distribution of fluorescent photon emission before (left) and after photobleaching (right).

## (II) HYBRID YIG-FERROMAGNET STRUCTURES FOR SPIN-WAVE DEVICES [3]

We studied coupled ferromagnetic layers, which could facilitate low loss, sub-100 nm wavelength spin-wave propagation and manipulation. One of the layers is a low-loss garnet film (such as YIG) that enables long-distance, coherent spin-wave propagation. The other layer is made of metal-based (Permalloy, Co, CoFe) magnetoelectronic structures that can be used to generate, manipulate and detect the spin waves. Using micromagnetic simulations (OOMMF) we analyzed the interactions between the spin waves in the YIG and the metallic nanomagnet structures and demonstrated the components of a scalable spin-wave based signal processing device. Such hybrid-metallic ferromagnet structures can be the basis of potentially high-performance, ultralow-power computing devices.

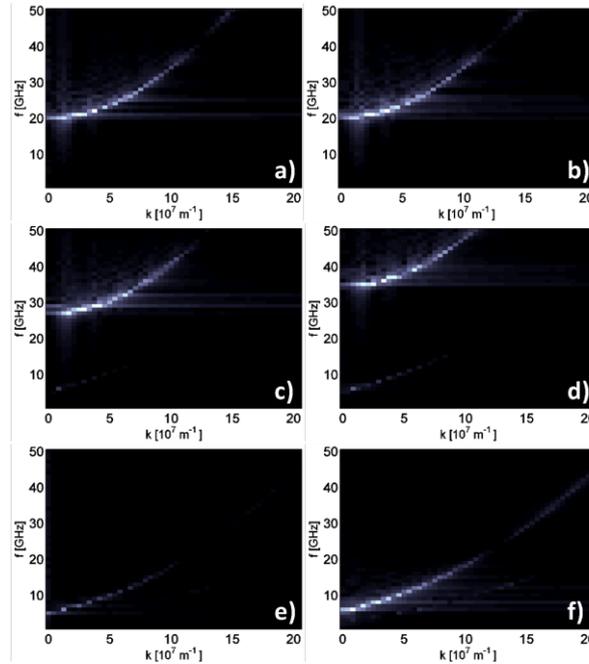


**Fig. 2** Numerically calculated dispersion plots for a YIG-Py bilayer. a) Stand-alone YIG film. b)  $A_{\text{interface}} = 0 \text{ J/m}$  c)  $A_{\text{interface}} = 0.5 \cdot 10^{12} \text{ J/m}$  d)  $A_{\text{interface}} = 1 \cdot 10^{12} \text{ J/m}$  e)  $A_{\text{interface}} = 6 \cdot 10^{12} \text{ J/m}$  f) Single Permalloy film. The YIG mode shifts due to the interaction and an additional Permalloy mode appears

*for stronger couplings.*

### (III) THRESHOLD GATE-BASED CIRCUITS FROM NANOMAGNETIC LOGIC [4]

We demonstrated the design of nanomagnetic logic (NML) gates with multiple weighted inputs, which are magnetic equivalents of threshold logic gates (TLGs). We used micromagnetic simulations (OOMMF) to show that NML TLGs can be constructed with minimum overhead compared to standard NML gates, and they significantly reduce device footprint and interconnection complexity of magnetic logic circuits. As an example, we designed a full adder circuit using said TLGs and compared its performance to majority-gate-based NML. TLG-based designs significantly reduce net circuit complexity, albeit at the price of decreasing their robustness. Special-purpose circuits may rely more heavily on TLGs than standard logic/arithmetic designs and may see bigger benefits.

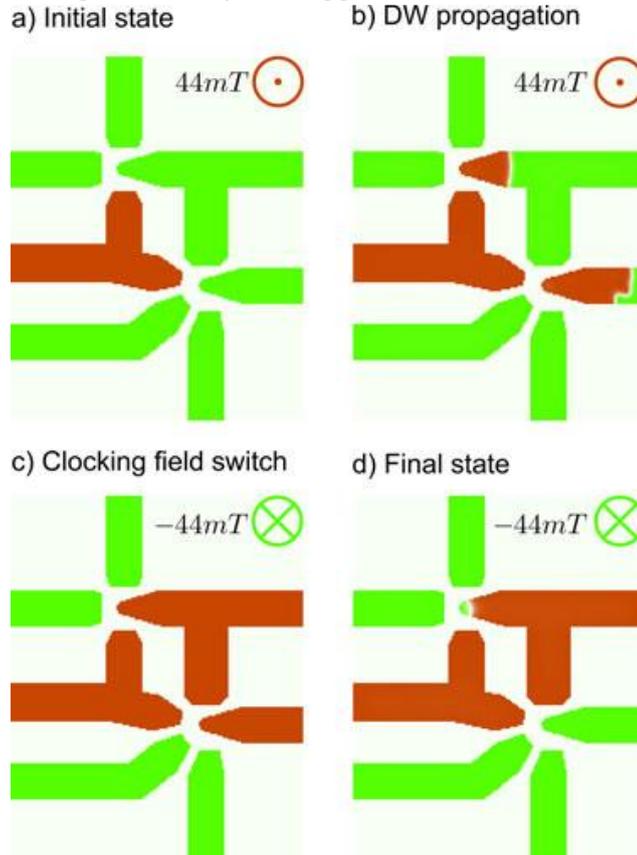


**Fig. 3** Snapshots of a micromagnetic simulation of the threshold gate. The green color represents the  $-1$  state ( $A, B, -S$ ), red is the  $+1$  state ( $C_{in}, -C_{out}$ ). (a) Initial state. (b) DW propagation. (c) Clocking field switch. (d) Final state.

### (IV) SPIN-WAVE BASED REALIZATION OF OPTICAL COMPUTING PRIMITIVES [5]

Using micromagnetic simulations (OOMMF) we demonstrated that spin waves can perform optically inspired, non-Boolean computing algorithms. We proposed and designed coherent spin-wave sources and phase shifters, which act akin to the key components of an optical signal processing system. We showed that the functionality of the proposed on-chip spin-wave based signal processing system is similar to known optical computing devices.

Such computing system may serve as a practical, energy efficient, and integrated component of nanoscale image processing systems.

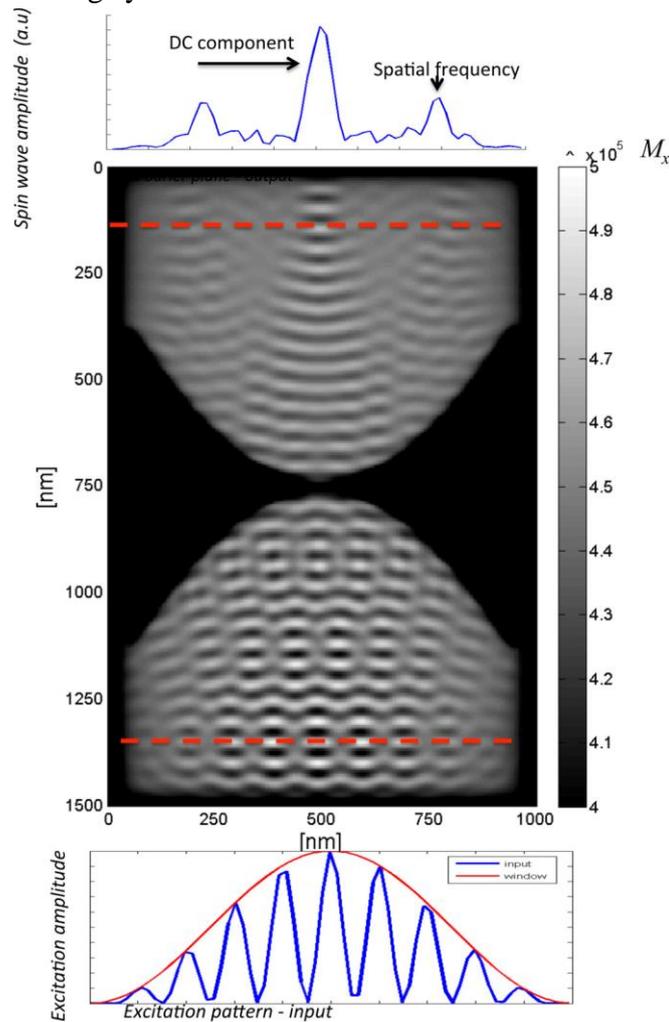

**Fig. 4** A micromagnetic simulation showing the Fourier transform property of a spin-wave lens. The input wave pattern enters at the bottom. The black area is where the  $B = 1.6 \text{ T}$  magnetic field is applied. The Fourier transform of the input vector appears as the intensity distribution in the focal plane, at the top of the simulation region.

#### REFERENCES:

- [1] I. B. Juhasz and A. I. Csurgay, "Simulation-based investigation of the three-dimensional distribution of fluorescence and photobleaching in multi-photon excited samples," in Proceedings of SPIE, 9131 (2014)
- [2] I. B. Juhasz, A. I. Csurgay, "Fluorescence in two-photon-excited, diffusible samples exposed to photobleaching—a simulation-based study" in Journal of Biomedical Optics (accepted on 2 December 2014)
- [3] A. Papp, W. Porod, and G. Csaba, "Hybrid YIG-ferromagnet structures for spin-wave devices," J. Appl. Phys., May 2015.
- [4] Papp, M. T. Niemier, A. Csurgay, M. Becherer, S. Breitzkreutz, J. Kiermaier, I. Eichwald, X. S. Hu, X. Ju, W. Porod, and G. Csaba, "Threshold Gate-Based Circuits From Nanomagnetic Logic," IEEE Trans. Nanotechnol., vol. 13, no. 5, pp. 990–996, Sep. 2014.

- [5] G. Csaba, A. Papp, and W. Porod, "Spin-wave based realization of optical computing primitives," J. Appl. Phys., vol. 115, no. 17, p. 17C741, May 2014.

## 2. CELLULAR WAVE COMPUTING AND SPATIAL-TEMPORAL ALGORITHMS

PÉTER SZOLGAY, Professor; BARNABÁS GARAY, Professor; ANDRÁS HORVÁTH, Assistant Professor; ÁKOS ZARÁNDY, Professor; MIKLÓS KOLLER, Assistant Professor; TAMÁS ZSEDOVITS, Assistant Professor

*Graduate students:* TAMÁS FÜLÖP, ATTILA STUBENDEK

The Cellular Wave Computing paradigm emerged as a new kind of computer, an algorithmically programmable spatial-temporal computer. Its spatial-temporal elementary instruction was the dynamics of a Cellular Nonlinear Neural Network (CNN) composed of simple nonlinear dynamic cells and local interaction patterns. These elementary instructions were combined algorithmically to form the CNN Universal Machine. Soon, a broader class of cell dynamics and local interaction patterns were introduced. A new kind of algorithmic thinking has developed and the first mixed-signal integrated circuit implementations appeared.

Right at the beginning of this new kind of computing principles, the neurobiological inspiration, in particular the retinal research and the visual pathway, was important. Actually, several cellular wave computing models had been developed following the new discoveries in retinal research.

The formal description of the algorithms on a Cellular Wave Computer had been defined as the alpha-recursive functions.

The arrival of commercially available cellular visual microprocessors (Eye-RIS of AnaFocus Ltd., Bi-i of Eutecus Inc., and Smart Photo Sensor of Toshiba Corp.) make this new computing paradigm a practical alternative for very low power, small form factor, and high computing power, high frame rate applications.

Nano-scale electronics technologies, both CMOS and beyond CMOS, provide the means to fabricate massively parallel systems with thousands or millions of processors/cores in a small package, as well as in low-power versions. Most of these architectures contain cellular or multi-cellular architectures where the precedence of geometric and logical locality is a must. The cells might vary both in function as well as in their modes of operation, including arithmetic or analog, logic, and symbolic cells, as well as integrated sensory elements. In the whole operation, the interplay between local dynamics and global dynamics plays an increasingly important role. The maturity of 3D integration technologies provides another mechanism for complexity and efficiency increase.

In addition to the architectural innovations and algorithmic mappings, the basic spatial-temporal dynamics in the Cellular Wave Computers are becoming more complex *leading to surprisingly new theoretical and practical results*, as well. This means that even the elementary spatial-temporal instructions of the CNN dynamics become more complex. In particular,

- i) the spatial-temporal input will be dynamic even in a Cellular Automaton,
- ii) one or more spatial-temporal waves defined by templates is used for a continuous dynamic input without breaking it into discrete-time frames, and the qualitative differences of the spatial-temporal output will code the input features (frameless

computing), and

- iii) oscillatory cells are used in a global synchronization mode, where the elementary computational primitive is a spatial-temporal synchronization effect.

In addition to these theoretical challenges, practical challenges emerge:

- i) the implementation of non-topographic problems (like particle filters),
- ii) the sense and avoid problems in avoiding the collision of a UAV and a bigger airplane,
- iii) the architectural solutions for beyond CMOS nano-electromagnetic technologies, e.g. informing associative memories, the specific use of nanomagnetic components and integrated systems (like Spintronic Oscillators and static nanomagnets).

**References** and a full recent overview can be found in

- [1] T. Roska. From standard CNN dynamics to Cellular Wave Computers, Chapter 4 in Chaos, CNN, Memristors, and Beyond (A. Adamatzky and G. Chen, eds.), World Scientific, Singapore, 2013

### 3. VIRTUAL AND PHYSICAL MACHINES WITH MEGA-PROCESSOR CHIPS – THEORETICAL AND EXPERIMENTAL RESULTS

PÉTER SZOLGAY, Professor; ANDRÁS KISS, Assistant Professor; ZOLTÁN NAGY, Associate Professor; CSABA NEMES, Postdoc; ISTVÁN REGULY, Postdoc  
*Graduate students:* ANTAL HIBA, ENDRE LÁSZLÓ

Many core computers are the current approach to the solution of computationally intensive problems. At the present day, many core may mean 1000 but soon few 100000 or even more processing elements will be available on a desktop machine.

New ideas and new methods are required in algorithm development for these types of architectures. Using the cellular architecture of processors and memories new kind of parallel algorithms have to be developed. For the same Physical multi-cellular machine architecture different Virtual Machines can be defined, the latter is serving for algorithmic and software development. However, all virtual machines are to be uniquely mapped to a specific Physical Machine (a chip or chip set, etc.). Hence all computing element has a geometrical position on the Physical Machine and a geometric or topographic address on the Virtual Machine. In this new scenario of computer science and computer engineering computational complexity, computing power is a multi-parameter vector, any algorithm solving a problem will have a speed-power-area-bandwidth-accuracy metric. These parameters and this metric should be handled simultaneously and optimized.


Some new principles are summarized below.

First of all, we do not have efficient compilers though many examples are solved daily. In some of our problems we have used the CNN Universal Machine as an intermediate platform for compiling algorithms. Namely, we have developed an efficient CNN Universal Machine simulator on the FPGA or GPU and if an algorithm is described by as a cellular wave computing algorithm defined on a CNN Universal Machine, the compiling problem is solved.

We emphasize that due to the topographic nature of the Physical machine, an optimal *partitioning and placement is also needed* on the virtual machine, or on the intermediate “compiler prototype” (like the CNN Universal Machine). A Field Programmable Gate Array (FPGA) based framework has been described to accelerate simulation of a tough topographic problem, a nonlinear wave problem that is a complex physical spatio-temporal phenomenon, such as fluid dynamics (the hard test-problem since the invention of the digital computer). We have studied this problem since a while to develop a prototype virtual machine platform for them.

- i) In the course of the design of an arithmetic unit which consists of locally controlled groups of floating point units both *partitioning and placement* aspects have to be considered. To solve this problem a framework has been elaborated in which the partitioning is based on an initial floor-plan of the vertices of the layered data-flow graph of the algorithm solving a given PDE or another problem. We have formulated this problem as a method for *implementing data-flow graphs on FPGAs*. The algorithm can minimize the number of cut nets and guarantee deadlock-free partitions.

- ii) In case of topographic problems, *complicated geometries require unstructured spatial discretization, which results in irregular memory access patterns* severely limiting computing performance. *Data locality* is improved by mesh node renumbering technique, which results in predictable memory access pattern. Additionally, *storing a small window of node data in the on-chip memory* of the FPGA can increase data reuse and *decrease memory bandwidth requirements*.
- iii) As one example, in numerical solution of fluid flows the generation of the floating-point data path and control structure of the arithmetic unit containing dozens of operators is a very challenging task when the goal is high operating frequency. Efficiency and use of the framework is described by a case study solving the Euler equations on an unstructured mesh using finite volume technique. On the currently available largest FPGA the generated architecture contains three processing elements working in parallel providing two orders on magnitude (90 times) speedup compared to a high performance microprocessor.
- iv) Numerical algorithms can be implemented by using fixed –point or Floating point arithmetic with different precision. The selection of the *optimal data precision* to the different steps of an algorithm is *NP complete*. As an example, the solution of the advection equation was analyzed by using first and second order discretization methods. For this example if the resources are on an FPGA, and power dissipation or processing speed is prescribed, we have developed and algorithm for determining an optimal bit width.
- v) A Fermi NVIDIA GPU based implementation of a CNN Universal Machine was also developed, and was analyzed and compared to a multicore, multithreaded CPU. The basic goal of this project is to get a clear picture about the capabilities and limits of GPUs.
- vi) Key algorithms are the different Kalman filter implementations in trajectory estimation of the intruder airplane. To increase the speed of computation of unscented nonlinear Kalman filter was implemented on Xilinx Spartan 6 LX45 FPGA. The speed of this implementation is approximately 1000 iteration /s. It would be important if we want to follow multiple targets.
- vii) CPU GPU collaboration to solve a computational intensive problem. The CPUs task is not only to organize the work on GPUs.

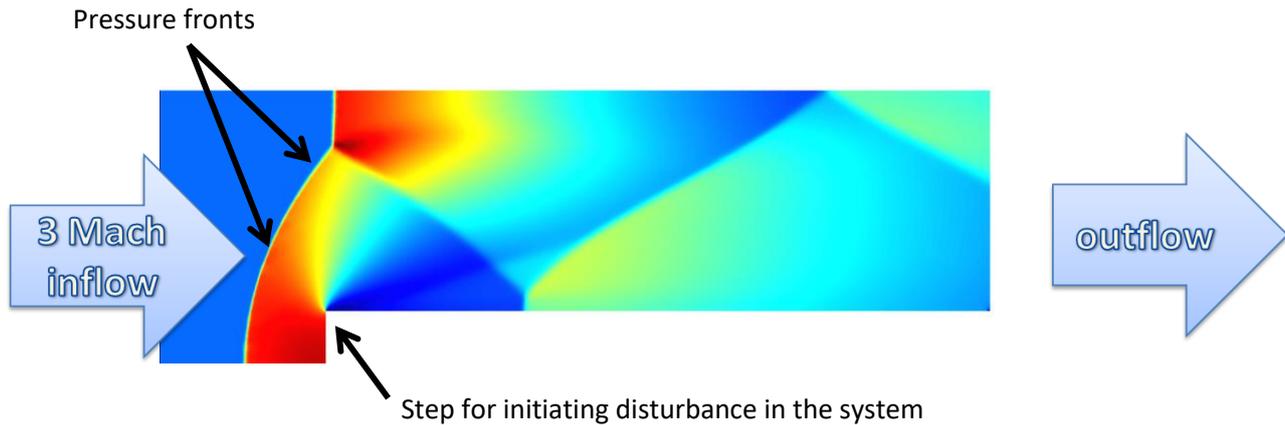

**Fig. 1** A two dimensional flow analysis was implemented on different array computing architectures

## PUBLICATIONS

- [1] Z. Nagy, P. Szolgay. Configurable Multi-Layer CNN-UM Emulator on FPGA, *IEEE Trans. on CAS I* Vol. 50, No. 6, pp. 774-778, 2003
- [2] Z. Nagy, P. Szolgay. Solving Partial Differential Equations on Emulated Digital CNN-UM Architectures”, *Functional Differential Equations*, Vol. 13, No. 1 pp. 61-87, 2006
- [3] P. Kozma, P. Sonkoly and P. Szolgay. Seismic Wave Modeling on CNN-UM Architecture”, *Functional Differential Equations*, Vo1. 13, No. 1, pp. 43-60, 2006
- [4] Z. Nagy, Zs. Vörösházi, P. Szolgay. Emulated Digital CNN-UM Solution of Partial Differential Equations, *Int. J. CTA*, Vol. 34, No. 4, pp. 445-470, 2006
- [5] Cs. Nemes, Z. Nagy and P. Szolgay. Automatic generation of locally controlled arithmetic unit via floorplan based partitioning, *Proc. of CNNA 2012*, Torino, 2012
- [6] A Kiss, Z. Nagy, Á. Csík and P. Szolgay. Examining the accuracy and the precision of PDEs on FPGA, *Proc. of CNNA 2012*, Torino, 2012
- [7] A. Hiba, Z. Nagy and M. Ruzinkó. Memory access optimization for computations on unstructured meshes, *Proc. of IEEE CNNA 2012*, Torino, 2012
- [8] E. László, P. Szolgay, Z. Nagy. Analysis of a GPU based CNN Implementation, *Proc. of IEEE CNNA2012*, Torino, 2012
- [9] Z. Nagy, Cs. Nemes, A. Hiba, A. Kiss, Á. Csík, P. Szolgay. FPGA Based acceleration of Computational Fluid Flow Simulation on Unstructured Mesh Geometry, *Proceedings of FPL*, Oslo, 2012
- [10] Z. Nagy, A. Kiss, Á. Zarándy, T. Zsedrovits, B. Vanek, T. Péni, J. Bokor, T. Roska. Volume and power optimized high-performance system for UAV collision avoidance, *Proc. of IEEE ISCAS 2012*, Seoul, 2012
- [11] Z. Nagy, Cs. Nemes, A. Hiba, Á. Csík, A. Kiss, M. Ruzinkó and P. Szolgay, “Accelerating unstructured finite volume computations on field programmable gate arrays”, *Concurrency and Computation: Practice and Experience*, Vol. 26, no 3, pp 615-643, 2013. DOI:10.1002/cpe.3022
- [12] Cs. Nemes, G. Barcza, Z. Nagy, Ö. Legeza and P. Szolgay, “The density matrix renormalization group algorithm on kilo-processor architectures: implementation and trade-offs”, *Computer Physics Communications*, 2014, DOI :10.1015/j.cpc.2014.02.021



## 4. NATURAL LANGUAGE PROCESSING

GÁBOR PRÓSZÉKY, Professor; BÁLINT SASS, Assistant Professor; MÁRTON MIHÁLTZ, Assistant Professor  
*Graduate students:* LÁSZLÓ LAKI, GYÖRGY OROSZ, BORBÁLA SIKLÓSI, ATTILA NOVÁK, ISTVÁN ENDRÉDY, BALÁZS INDIG



### SHORT DESCRIPTION OF THE ACTIVITIES

The Natural Language Processing Group consists of faculty researchers, post-graduate researchers, PhD students, undergraduate students and programmers who work together developing algorithms that enable computers to process and understand human languages. Our research interest covers:

- corpus linguistic applications
- statistical machine translation
- syntactic parsing
- medical text mining
- morphologies
- spelling correction
- part-of-speech tagging

One of the most ambitious aims of the research group is to develop new methods and algorithms for syntactic parsing of the Hungarian language. Such a method must handle grammatically possible, but not correct analyses. That is why to deal with problems efficiently, *parallelism* is necessary. In practice for a human understanding is cooperatively done by several parts of the brain. To incorporate this knowledge the consideration of current state of the neurolinguistics and psycholinguistics is indispensable. The model that is to be researched is characterized by *performance*, while the state-of-the-art research results are considered from various field of applied linguistics. Since the current state of research does not provide any deeper understanding of how the ambiguous phrases are understood, in our project we incorporate parallel corpora to handle these—not necessarily multilingual—problems. With this *new aspects of corpus linguistic* research are being revealed. The developed new methods are adapted to many aspects of Hungarian language. For using it for medical text processing tasks, we expect growing performance and precision. The developed algorithms are also planned to be adapted to other agglutinating languages and are expected to behave similarly well.

## PUBLICATIONS

- [1] G. Prószéky, Cs. Merényi. Language Technology Methods Inspired by an Agglutinative, Free Phrase-Order Language. In: Walther von Hahn, Cristina Vertan (eds.) *Multilingual Processing in Eastern and Southern EU Languages: Low-Resourced Technologies and Translation*. Cambridge: Cambridge University Press, 2012
- [2] B. Siklósi, Gy. Orosz, A. Novák, G. Prószéky. Automatic structuring and correction suggestion system for Hungarian clinical records. In *8th SaLTMiL Workshop on Creation and Use of Basic Lexical Resources for Less-resourced Languages*, pp. 29–34, 2012
- [3] Gy. Orosz, A. Novák. PurePos – An Open Source Morphological Disambiguator. In *Proceedings of the 9th International Workshop on Natural Language Processing and Cognitive Science*, pp. 53–63, 2012
- [4] Gy. Orosz. PurePos: hatékony morfológiai egyértelműsítő. In *VI. Alkalmazott Nyelvészeti Doktoranduszkonferencia*, 2012
- [5] B. Siklósi, Gy. Orosz, A. Novák. Magyar nyelvű klinikai dokumentumok előfeldolgozása. In: *VIII. Magyar Számítógépes Nyelvészeti Konferencia*, p. 143, 2011
- [6] A. Novák, Gy. Orosz, B. Indig. Javában taggelünk. In: *VIII. Magyar Számítógépes Nyelvészeti Konferencia előadásai*, p. 336, 2011
- [7] Gy. Orosz. Investigating Hungarian POS-tagging Methods. In: *Proceedings of the Multidisciplinary Doctoral School, 2010-2011 Academic Year*. Faculty of IT, Pázmány Péter Catholic University, Budapest, pp. 77–80, 2011
- [8] L. Laki. Investigating the Possibilities Using SMT for Text Annotation. In: *Proceedings of the Multidisciplinary Doctoral School, 2010-2011 Academic Year*. Faculty of IT, Pázmány Péter Catholic University, Budapest, pp. 81–84, 2011
- [9] L. Laki, G. Prószéky. Statisztikai és hibrid módszerek párhuzamos korpuszok feldolgozására. In: Tanács A., Vincze V. (eds.) *A VII. Magyar Számítógépes Nyelvészeti Konferencia előadásai*. Szeged:SZTE, pp. 69–79, 2010
- [10] I. Endrédi, L. Fejes, A. Novák, B. Oszkó, G. Prószéky, S. Szeverényi, Zs. Várnai, B. Wágner-Nagy. Nganasan – Computational Resources of a Language on the Verge of Extinction, In: K. Sarasola, F. M. Tyers, M. L. Forcada (eds.) *Creation and Use of Basic Lexical Resources for Less-Resourced Languages: 7th SaLTMiL Workshop*. La Valletta, Málta pp. 41–44, 2010
- [11] L. Laki. Investigating the Possibilities of Processing Parallel Resources with Language Statistical Methods. In: *Proceedings of the Multidisciplinary Doctoral School, 2009-2010 Academic Year*. Faculty of Information Technology, Pázmány Péter Catholic University, Budapest, pp. 69–72, 2010

## 5. DISCOVERY RESEARCH IN NEUROBIOLOGY

(Department of Neuroscience, adjunct location at the Institute of Experimental Medicine of the Hungarian Academy of Sciences)


TAMÁS FREUND, Professor, head of department (cellular and network neurobiology); ZSOLT LIPOSITS, Professor (endocrine neurobiology); IMRE KALLÓ, Associate Professor; SZABOLCS KÁLI, Associate Professor; BARBARA VIDA, Assistant Professor

*Graduate students:* ERZSÉBET FARKAS, ATTILA JÁDY

### RESEARCH ACTIVITY

**Cellular and Network Neurobiology Group** Research in the group aims to identify the cellular and network mechanisms of the generation of characteristic cortical (mainly hippocampal) activity patterns using *in vitro* electrophysiology and computer simulations.

1. A hippocampal slice preparation, which exhibits spontaneous repetitive sharp waves under control conditions, and which can be induced to generate gamma oscillations by the application of cholinergic drugs, has been developed. In parallel, a large-scale network model of the CA3 area based on experimentally determined cellular and network parameters has been constructed, which consists of interacting pyramidal cell and interneuron populations, and exhibits repetitive sharp waves (including accompanying high-frequency ripple oscillations) very similar to their experimental counterparts. (Figure 1) (Káli *et al.*, 2012). The model also made explicit predictions concerning the mechanisms which contribute to the generation of sharp waves: it suggested that the initiation of sharp waves relies on random fluctuations of population activity, while the termination of sharp waves probably requires some novel form of slow negative feedback.

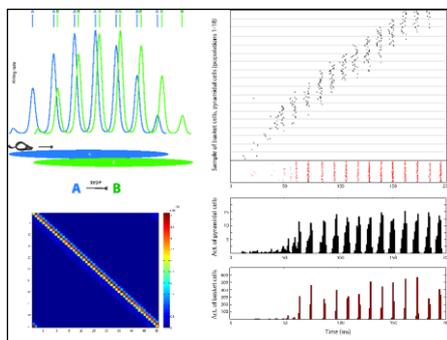


**Fig. 1** (top left) activity during exploration of two CA3 pyramidal cells with overlapping place fields, showing theta phase precession; (bottom left) matrix of synaptic weights between pre- and postsynaptic populations, ordered by place field location, which formed during exploration as a result of spike-timing-dependent plasticity; (right) spontaneous replay of learned sequences of activity during sharp-wave-associated ripple oscillation.

2. The effects of neuronal morphology and voltage-gated conductances on the frequency-dependent impedance of neurons are also investigated.

**Endocrine Neurobiology Group** A major long-term goal of the group is the elucidation of neuronal and hormonal mechanisms acting centrally in the neuroendocrine control of reproduction. One particular focus is on central actions of estrogen on estrogen-receptive neuronal systems throughout the brain. Further, hormonal and afferent neuronal control of gonadotropin-releasing hormone (GnRH) neurons is studied, with special regard to negative and positive estrogen feedback to these cells which underlies reproductive cyclicity in the female. In addition to rodents, neuronal networks innervating human GnRH neurons are also in the scope of studies using post-mortem human brain samples. The impact of diminishing estradiol signaling on diverse brain functions during menopause is also under exploration in rodent models of menopause by means of gene expression profiling. This translational

research supports drug discovery targeting the safe and novel way of hormone replacement therapy for menopausal women.

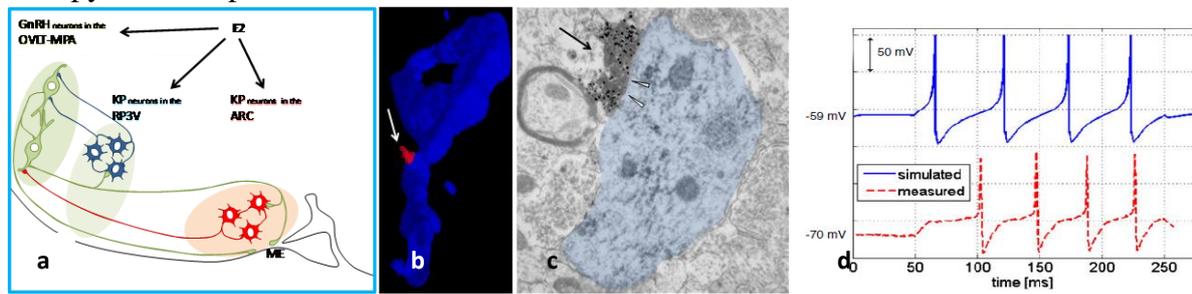

**Fig. 2** Interaction of key neuronal elements of the hypothalamic regulatory center for reproduction. (a) Network model of kisspeptin (KP) and gonadotropin-releasing hormone (GnRH) neurons. Traditional synaptic (b,c), as well as, non-synaptic mechanisms (direct hormonal, volume and retrograde transmission) act within the network, which ultimately determine the firing (d) and secretory activity of the GnRH neurons.

Another line of discovery research is dedicated to obtain integrated knowledge from structural, functional and molecular aspects of the complex hypothalamic mechanisms that regulate stress, adaptation and metabolism. A special emphasis is placed on the neuronal circuitry involved in the central regulation of the hypothalamic-pituitary-adrenal and thyroid axes, and the crucial role of type-2 deiodinase in thyroid hormone actions in the brain. These studies use cutting-edge light and electron microscopic techniques, a wide repertoire of molecular biological techniques and slice electrophysiology. The translational value of these efforts is manifested in the better understanding of the role of the brain in development of obesity and addiction, and the dissection of molecular mechanisms of thyroid hormone actions.

## PUBLICATIONS

- [1] Kallo I, Mohacsik P, Vida B, Zeold A, Bardoczi Z, Zavacki AM, Farkas E, Kadar A, Hrabovszky E, Arrojo e Drigo R, Dong L, Barna L, Palkovits M, Borsay BA, Herczeg L, Lechan RM, Bianco AC, Liposits Z, Fekete C, Gereben B. A: *PLOS ONE* 7:(6), 2012
- [2] T. F. Freund, S. Káli. *Scholarpedia*, 3(9):4720, 2008.
- [3] Zemankovics R, Káli S, Paulsen O, Freund TF, Hájos N.. *J Physiol*;588:2109-32, 2010
- [4] Káli S, Zemankovics R. *J Comput Neurosci*;33(2):257-84, 2012
- [5] Jo S, Kallo I, Bardoczi Z, Arrejo e Drigo R, Zeold A, Liposits Z, Oliva A, Lemmon VP, Bixby JL, Gereben B, Bianco AC.: *J Neurosci*, 32: (25)8491-8500, 2012
- [6] Molnar CS, Vida B, Sipos MT, Ciofi P, Borsay BA, Racz K, Herczeg L, Bloom SR, Ghatei MA, Dhillon WS, Liposits Z, Hrabovszky E.: *Endocrinology*, 153: (11)5428-5439, 2012
- [7] Sarvari M, Hrabovszky E, Kallo I, Solymosi N, Toth K, Liko I, Szeles J, Maho S, Molnar B, Liposits Z. *J Neuroinflamm*, 8: (1)82 , 2011
- [8] Farkas I, Kallo I, Deli L, Vida B, Hrabovszky E, Fekete C, Moenter SM, Watanabe M, Liposits Z.: *Endocrinology*, 151: (12)5818-5829, 2010
- [9] Kola B, Farkas I, Christ-Crain M, Wittmann G, Loll F, Amin F, Harvey-White J, Liposits Z, Kunos G, Grossman AB, Fekete C, Korbonits M.: *PLOS ONE*, 3: (3)e1797, 2008

## 6. BIOINFORMATICS AND SELF-ORGANIZATION

SÁNDOR PONGOR, Professor; ZSOLT GELENCSÉR, Postdoc; DÓRA BIHARY, Postdoc  
*Graduate students:* GÁBOR RÉTLAKI, JÁNOS JUHÁSZ, ÁRON ERDEI

### BIOINFORMATICS OF SELF-ORGANIZING MICROBIAL COMMUNITIES

Multispecies bacterial communities are a major form of life, examples range from giant underwater microbial mats of the oceans to the rich bacterial flora of the human body and to the microbial communities of the rhizosphere. Members of bacterial communities compete for space and resources, but they also communicate and cooperate via chemical materials. Communication and cooperation convey communities' stability over time and resilience against environmental challenges, similar to multicellular organisms. As a result, microbial communities are more versatile and adaptable than the individual cells or species they are made of. Namely, communities can add up the skills, the metabolic repertoire of the constituent species so they are able to solve problems that a single cell or a single species cannot. The underlying mechanism – often referred to as quorum sensing – is relatively simple: the chemical signals emitted by single cells enable cells to sense how many they are in the environment. Self-organization, stability and collapse phenomena of microbial communities can be experimentally studied, and there are exciting analogies with crisis situations present in human societies or economic markets. And there are examples that some diseases are not caused by a single microbial species but by a team in which pathogens and otherwise harmless symbionts peacefully collaborate in exploiting an unsuspecting host. For a more efficient defense we need to better understand the principles of cooperation within microbial communities.

Our group uses agent based models to simulate bacterial communities, and to establish how sharing of signals and/or public goods contributes to colonization and infection. We showed that sharing public goods allows several bacteria species to cross barriers that the single species can not. We use bioinformatics tools to map the chromosomal location and the local topology of the genes responsible for communication and cooperation, and maintain a repository of the participating genes.

#### COLLABORATORS:

Ádám Kerényi, PhD student, Szeged, Biological Center;

Dr. Péter Galajda, Szeged, Biological Center;

Prof. Pál Ormos, Szeged, Biological Center;

Dr. Vittorio Venturi, International Centre for Genetic Engineering and Biotechnology, Trieste, Italy;

Dr. Attila Kertész-Farkas, International Centre for Genetic Engineering and Biotechnology, Trieste, Italy.

PUBLICATIONS:

- [1] Gelencsér, Z.; Choudhary, K.S.; Coutinho, B.G.; Hudaiberdiev, S.; Galbáts, B.; Venturi, V.; Pongor, S. Classifying the topology of AHL-driven quorum sensing circuits in proteobacterial genomes. *Sensors*. 12(5), 5432-5444, 2012
- [2] Gelencsér, Z.; Galbáts, B.; Gonzalez, J.F.; Choudhary, K.S.; Hudaiberdiev, S.; Venturi, V.; Pongor, S. Chromosomal arrangement of AHL-driven quorum sensing circuits in *Pseudomonas*. *ISRN Microbiology*. 6, 2012
- [3] Mattiuzzo, M.; Bertani, I.; Ferluga, S.; Cabrio, L.; Bigirimana, J.; Guarnaccia, C.; Pongor, S.; Maraite, H.; Venturi, V. The plant pathogen *Pseudomonas fuscovaginae* contains two conserved quorum sensing systems involved in virulence and negatively regulated by RsaL and the novel regulator RsaM. *Environ Microbiol*. 13(1), 145-162, 2011
- [4] Kerényi, A.; Suárez-Moreno, Z.R.; Venturi, V.; Pongor, S. Multispecies microbial communities. Part II: Principles of molecular communications. *Medical Mycology*. 17, 113-116, 2010
- [5] Kuzniar, A.; Dhir, S.; Nijveen, H.; Pongor, S.; Leunissen, J.A. Multi-netclust: an efficient tool for finding connected clusters in multi-parametric networks. *Bioinformatics*. 26(19), 2482-2483, 2010
- [6] Suárez-Moreno, Z.R.; Kerényi, A.; Pongor, S.; Venturi, V. Multispecies microbial communities. Part I: quorum sensing signaling in bacterial and mixed bacterial-fungal communities. *Medical Mycology*. 17, 108-112, 2010
- [7] Venturi, V.; Bertani, I.; Kerényi, A.; Netotea, S.; Pongor, S. Co-swarming and local collapse: quorum sensing conveys resilience to bacterial communities by localizing cheater mutants in *Pseudomonas aeruginosa*. *PLoS One*. 5(4), e9998, 2010
- [8] Venturi, V.; Kerényi, A.; Reiz, B.; Bihary, D.; Pongor, S. Locality versus globality in bacterial signalling: can local communication stabilize bacterial communities?. *Biology Direct*. 5, 30, 2010
- [9] Netotea, S.; Bertani, I.; Steindler, L.; Kerényi, A.; Venturi, V.; Pongor, S. A simple model for the early events of quorum sensing in *Pseudomonas aeruginosa*: modeling bacterial swarming as the movement of an "activation zone". *Biol Direct*. 4, 6, 2009

## 7. STRUCTURAL BIOINFORMATICS & PROTEOMICS


ZOLTÁN GÁSPÁRI, Associate Professor

Graduate students: SÁNDOR BABIK, LÁSZLÓ DOBSON, ANNAMÁRIA KISS-TÓTH, ANETT KORAI


### MAIN PROJECTS

- 1) Generation and analysis of dynamic protein conformational ensembles
- 2) Complex evolutionary investigations of selected groups of proteins

Proteins are the most versatile biomolecules responsible for a number of tasks on living organisms. Their efficiency is conventionally attributed to their geometric and physicochemical complementarity with their partners that can be e.g. other proteins, nucleic acids or small molecules like drugs. However, proteins are not static entities but display dynamics on time scales spanning 14 orders of magnitude. In the last decade, the exact mode of action is linked to internal dynamics and its changes for an increasing number of proteins. In spite of this, atomic-level descriptions of experimentally determined internal protein motions are not routinely generated and used for explaining biological phenomena. Our aim is to use and further develop an approach that synergistically puts together conventional molecular dynamics calculations and restraints determined with experimental techniques, primarily NMR spectroscopy. The calculations result in an ensemble of conformations that reflect the internal dynamics of the molecule on a given time scale and are in agreement with experiments. Such ensembles can be used to investigate the role of dynamics in partner molecule binding, catalysis and regulation and are expected to lead to a deeper understanding of the nature of intra- and intermolecular interactions. Molecules studied at the moment include serine protease inhibitors for which the inclusion of dynamics is in contrast with standard textbook knowledge, the antifungal protein PAF with potential therapeutic value, a DNA polymerase involved in DNA repair, the electron-transfer protein azurin and the small prolyl isomerase parvulin.

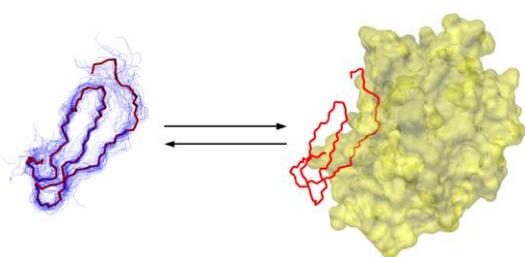


**Fig. 1** Scheme of protease binding by a peptidic inhibitor. The conformational ensemble characteristic of motions in the free state (blue) includes structures that resemble the bound state (red).

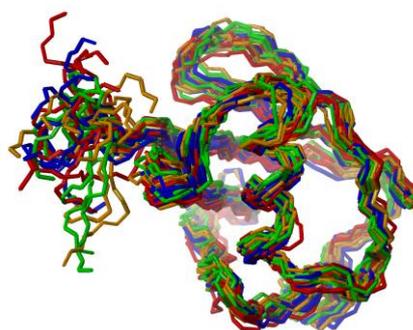

**Fig. 2** Conformational ensemble of ubiquitin generated with a new method currently under development. Structures with the same color represent motions on the ps-ns time scale whereas the full ensemble describes submicrosecond dynamics.

Our complex evolutionary investigations presently focus on three groups of proteins: 1) *de novo* proteins, i.e. proteins that emerged relatively recently in evolution *via* transcription and translation of previously noncoding sequences, 2) proteins with the structural motif 'charged single alpha helix' (CSAH) and 3) proteins involved in synaptic processes.

*De novo* protein emergence is a process that was proposed decades ago but the first actual examples of which have just been described in the past years. Our research so far focuses on the general structural properties of such proteins, particularly their propensity to aggregate, a feature common to all proteins and which is considered a significant threat to living organisms. Our first-approximation model study shows that the expected aggregation potential of (random) novel proteins depends on the GC-content of the underlying coding DNA segment and in the most common cases does not exceed that of existing proteins.

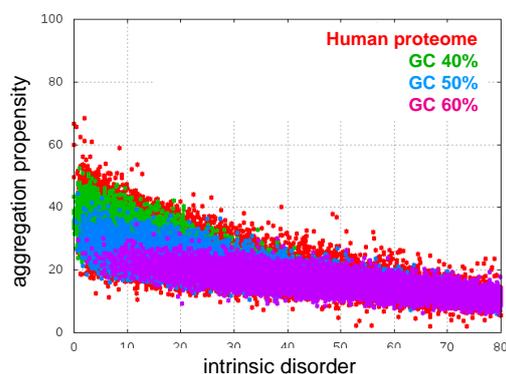

**Fig. 3** Comparison of predicted disorder and aggregation propensity of *de novo* proteins translated from random DNA segments with GC-contents of 40, 50 60% with the same predicted properties of proteins in the human proteome.

The charged single alpha-helix is a recently recognized structural motif characterized by high density of regularly alternating charged residues. We have developed methods for their detection and concluded that although it is a rare motif, CSAH-bearing proteins are preferentially associated with RNA-binding and processing. We found that protein segments that are predicted both to form coiled coils and to be intrinsically disordered display an amino acid abundance profile that is similar to CSAHs, suggesting a possible evolutionary transition between these similar but functionally not always interchangeable motifs.

The aim of investigating the evolution of synaptic proteins is to find possible links between different aspects of gene evolution such as changes in regulation, mRNA stability and processing and protein structure and partner specificity. We hope that gradually extending both the number of proteins and the aspects investigated, we get deeper understanding of the uniqueness and evolution of the human brain.

## PUBLICATIONS

- [1] Zoltán Gáspári, Péter Várnai, Balázs Szappanos, András Perczel: Reconciling the lock-and-key and dynamic views of canonical serine protease inhibitor action. *FEBS Lett.* 584:203-206, 2010
- [2] Annamária F. Ángyán, András Perczel, Zoltán Gáspári: Estimating intrinsic structural preferences of *de novo* emerging random-sequence proteins: is aggregation the main bottleneck? *FEBS Lett.* 586:2468-2472, 2012
- [3] Zoltán Gáspári, Dániel Süveges, András Perczel, László Nyitray, Gábor Tóth: Charged single alpha-helices in proteomes revealed by a consensus prediction approach. *Biochem. Biophys. Acta - Proteins and Proteomics* 1824:637-646, 2012

## 8. ANALYSIS AND CONTROL OF DYNAMICAL SYSTEMS

GÁBOR SZEDERKÉNYI, Professor; DÁVID CSERCSIK, Assistant Professor; JÁNOS RUDAN, Postdoc

*Graduate students:* ZOLTÁN A. TUZA, BERNADETT ÁCS

### SCIENTIFIC BACKGROUND: THE SYSTEM THEORETIC POINT OF VIEW

Although models are “really nothing more than an imitation of reality”, their widespread utilization not only in research and development but also in the everyday life of developed societies is clearly indispensable. Due to the complexity of system components and their possible interactions, without building, analyzing and simulating appropriate models, we could not predict the outcome of common events, not to mention the operation of involved technological or living systems. When we are interested in the evolution of certain quantities usually in time and/or space, we use dynamic models. The deep understanding and the targeted manipulation of such models’ behaviour are in the focus of *systems and control theory* that provides a common framework for handling dynamical models from different application fields and thus supports to form an interdisciplinary viewpoint on electrical, mechanical, thermodynamical or biological systems.

### RESEARCH TOPICS

#### **Computational analysis and synthesis of quantitative biological models**

The key importance of dynamics in the explanation of complex phenomena occurring in living systems is now a commonly accepted view. Besides the sufficient maturity of systems and control theory, the accumulation of biological knowledge mainly in the form of reliable models and the recent fast development in computer and computing sciences converged to the birth of a new discipline called systems biology, which can hopefully address important challenges in the field of life sciences in the near future. For modeling biological processes, we primarily use two related canonical nonnegative system classes that have clear biological relevance, good dynamical descriptive power, and a computationally advantageous algebraic structure: the quasi-polynomial system class and the kinetic system class coming originally from biochemistry.

The structural non-uniqueness of biochemical reaction network models is an intensively studied area with applications in the structural and parametric identification (inference) of biological networks. We have been developing optimization-based computational procedures for the determination of network structures that are dynamically equivalent or similar to a given initial kinetic system [1]. The existence or non-existence of reversible, weakly reversible, complex or detailed balanced structures has important consequences regarding the qualitative dynamical properties of the modeled network [2]. Moreover, the developed optimization framework is suitable for the algorithmic building of chemical network structures corresponding to a given dynamics.

Our other important research topic is the modeling and parameter estimation of biological systems based on real measurement data. We have developed and validated GnRH models with biological relevance that can produce all required complex dynamical phenomena (e.g. bursting) in cooperation with the Institute of Experimental Medicine of the Hungarian

Academy of Sciences [3,4]. Moreover, we have given an effective method for the parameter estimation of a human blood-glucose dynamics model [7]. The mathematical model of a cell-free transcription/translation process suitable for identification was developed and analyzed in [5].

### Nonlinear control

The main question in our work related to the design of controllers for nonlinear systems is how the physical/chemical properties of these models can be used for effective control. In [6] we propose a hierarchically structured model for process systems that gives rise to a distributed controller structure that is in agreement with the traditional hierarchical process control system structure where local controllers are used for mass inventory control and coordinating controllers are used for optimizing the system dynamics. In [8] we give a computational solution for obtaining a closed loop nonlinear polynomial system that corresponds to a weakly reversible deficiency zero network and thus satisfies robust stability properties.

### PUBLICATIONS

- [1] Z. A. Tuza, G. Szederkényi, K. M. Hangos, A. A. Alonso, and J. R. Banga. Computing all sparse kinetic structures for a Lorenz system using optimization, *International Journal of Bifurcation and Chaos* 23: 1350141.1-1350141.17, 2013
- [2] J. Rudan, G. Szederkényi, K. M. Hangos, and T. Péni Polynomial time algorithms to determine weakly reversible realizations of chemical reaction networks, *Journal of Mathematical Chemistry*, 52: 1386-1404, 2014
- [3] D. Csercsik, I. Farkas, G. Szederkényi, E. Hrabovszky, Z. Liposits, and K. M. Hangos. Hodgkin-Huxley type modelling and parameter estimation of GnRH neurons. *Biosystems*, 100:198–207, 2010
- [4] D. Csercsik, K. M. Hangos, and G. Szederkényi. Identifiability analysis and parameter estimation of a single Hodgkin-Huxley type voltage dependent ion channel under voltage step measurement conditions. *Neurocomputing*, 77:178–188, 2012
- [5] D. Siegal-Gaskins, Z. A. Tuza, J. Kim, V. Noireaux, R. M. Murray. Gene circuit performance characterization and resource usage in a cell-free "breadboard", *ACS Synthetic Biology*, 3: 416-425, 2014
- [6] K. M. Hangos and G. Szederkényi. A model structure-driven hierarchical decentralized stabilizing control structure for process networks, *Journal of Process Control*, 2014, 24, 1358-1370
- [7] E. Lakatos, D. Mészéna and G. Szederkényi. Identifiability Analysis and Improved Parameter Estimation of a Human Blood Glucose Control System Model, 11th International Conference on Computational Methods in Systems Biology - CMSB 2013, Klosterneuburg, Austria, 22-24 September, 248-249, 2013
- [8] G. Lipták, G. Szederkényi, and K. M. Hangos. Kinetic feedback computation for polynomial systems to achieve weak reversibility and minimal deficiency, 13th European Control Conference, ECC 2014, 06. 24 - 06. 27, Strasbourg, France, 2014, 2691-2696
- [9] Rudan, J. Optimization-based analysis and control of complex networks with nonlinear dynamics, PhD thesis, Multidisciplinary PhD School of Engineering and Science, Pázmány Péter Catholic University, Budapest, Hungary, 2014

## 9. ELECTROPHYSIOLOGY – INVASIVE AND NON-INVASIVE BIONIC INTERFACES

GYÖRGY KARMOS, Professor; ISTVÁN ULBERT, Associate Professor

*Graduate students:* EMÍLIA TÓTH, KATHARINA HOFER, BÁLINT PÉTER KERÉKES, ÁGNES KANDRÁCS, MILÁN SZEKERKA, PATRÍCIA BEREGSZÁSI, GERGELY CSÁNY, TAMÁS ZÖLDY, ZALÁN RAJNA, ZSUZSANNA KÖVÁRI, CSILLA SZABÓ, VIRÁG BOKODI, BARBARA FRAN CZ

The Electrophysiology Laboratory was established by the University as a research and education facility, located in the Jedlik building. The Laboratory heavily collaborates with the Institute of Cognitive Neuroscience and Psychology, Institute of Technical Physics and Materials Science (RCNS HAS), Institute of Experimental Medicine (HAS) and the National Institute of Neurosciences. The Laboratory integrates several disciplines including electrophysiology, materials science, chip- and micro electromechanical systems (MEMS) research, computational research, neurology research and optical imaging research in order to investigate the physiological and pathological functions of the central nervous system.

Two rooms are assigned to the Laboratory one for conducting experiments and the other for data processing. In the experimental room there are two computers capable of acquiring and analyzing bioelectrical signals, a stereo-microscope and stereotaxic device essential for animal experiments and several supplementary tools (oscilloscope, amplifiers, sterilization tools, electrical and mechanical stimulators and animal keeping chamber). In the data processing room there are three computers with software necessary to analyze the large volume of data generated in the experimental room.

The Laboratory is involved in bionic probe research by designing and validation of various probe structures realized by the partners. These probes are usually brain implantable devices, which can detect electrical activity of cortical and sub-cortical structures in animals. We are also providing histology studies to verify the biocompatibility of the devices developed. Besides Hungarian partners, the Laboratory is also involved in probe design and testing at IMEC (Belgium) and IMTEK (Germany) in the scope of an EU FP7 project. We also take leading role in the research and development of active probes used in the study of multi-scale interactions in the thalamo-cortical system in animal models.

The Laboratory is also involved in the investigation of the cortical generators of event related potentials, spontaneous and epileptic activity in animal models and in humans. A number of collaborative research projects are running on the field of in vivo and in vitro electrophysiology and optical imaging in epileptic and tumor patients and in animal models. In particular, one of our current main research interests is the functional characterization of the thalamo-cortical neural networks responsible for the sensory information processing.

Recently, in collaboration with our partners we investigated the cortical sources of slow sleep oscillations in humans. We described several unique characteristics of neocortical neural networks during depolarized and hyperpolarized phases of the sleep slow oscillation. Our results showed that in the generation of slow oscillation the superficial cortical layers played a leading role, in contrast to animal models, where the deep layers were more involved. In addition, we have shown that human cortical neurons fire substantially less than neural cells of animals and this firing pattern may have an important role in memory consolidation during sleep.



## 10. MULTI-PHOTON MICROSCOPY

BALÁZS RÓZSA, Associate Professor; BALÁZS CHIOVINI, Supervisor; GERGELY SZALAY, Supervisor; GERGELY KATONA, Supervisor


*Graduate students:* BALÁZS PÁLFI, ZOLTÁN SZADAI, MIKLÓS MADARÁSZ, LINDA JUDÁK, TAMÁS LAKNER, GÁBOR JUHÁSZ, JANKA HATVANI

### MISSION STATEMENT

To further understand the computational mechanism of the brain we need complex techniques to be able to measure from large population of neurons, but also with great details and subcellular resolution. The main goal of our group is to adopt and develop novel imaging techniques for scientific researches which make this quest attainable. With our novel developments it became possible to follow the activity of the entire dendritic tree of a neuron in three dimensions or to record hundreds of cells simultaneously in an intact neuronal network (Katona et al. 2012 Nature Methods, Katona et al. 2011 PNAS). For example our 3D acousto-optical microscope provides over 1,000,000-fold higher measurement speed as compared to the commercially available laser scanning methods (Katona et al. 2012 Nature Methods). Using these techniques in hand, we can address biological questions that could be only addressed with these novel tools. We are interested in better understand the role of the integration on a single neuron interacting with a large network. For example we are studying the dendritic integration on a single neuron during sharp wave ripple oscillation (Chiovini et al. 2014 Neuron). A larger scale project is to find out the role of a single neuron within different network ensembles during learning tasks performed by the animal. Specifically we are investigating of the neuronal level coding of the visual cortex during different visual stimulation and behavioral paradigms. The Two-Photon Imaging Laboratory is closely collaborating with research at the Institute of Experimental Medicine and also with the multidisciplinary research team of Femtonics Ltd.


### 3D TWO-PHOTON IMAGING

To understand the fast computational mechanisms of the brain, one needs to be able to perform rapid measurements at several sites along a single neuron as well as to image large populations of neurons. Traditional two-dimensional measurements are severely limited for

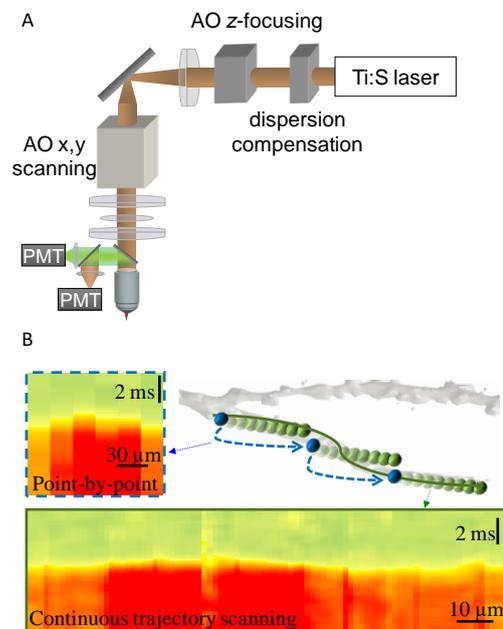

**Fig. 1** A: Block diagram of two-photon 3D Acousto-optical microscope light path for fast z and lateral scanning. B: Point-by-point continuous 3D trajectory scanning of dendritic segments. Examples of  $\text{Ca}^{2+}$  responses: point by point (top left) and continuous trajectory

such kinds of endeavors since neurons are located in three dimensions. To overcome this problem, we have developed new solutions to perform three-dimensional functional imaging with large scanning ranges along the z direction (Katona et al. 2012 Nature Methods, Katona et al. 2011 PNAS). With our three-dimensional microscopes we are able to maintain point or trajectory scanning which in combination with the  $\sim 800 \mu\text{m}$  penetration depth of two-photon technology makes our methodology very convenient for *in vivo* measurements of neuronal populations, too.

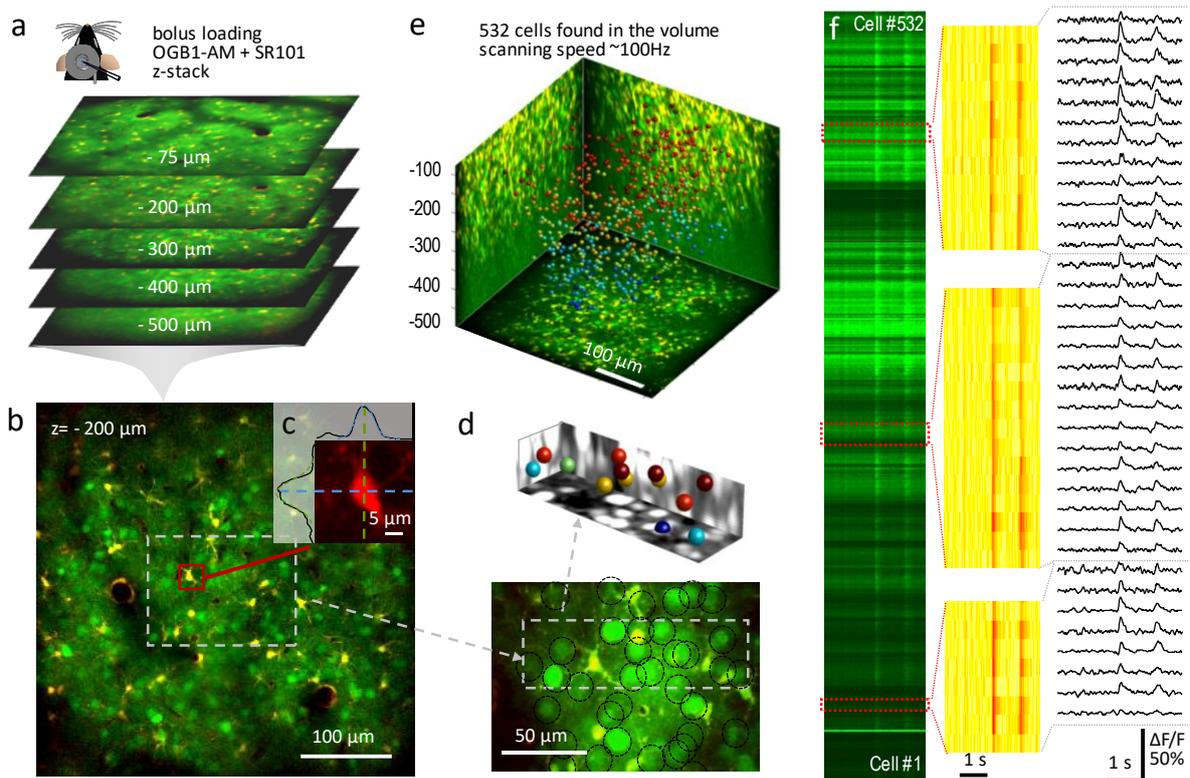

**Fig. 2 High-speed 3D calcium imaging of spontaneous neuronal network activity *in vivo*** (a) (Top) Sketch of *in vivo* experimental arrangement. (Bottom) Staining by bolus loading (OGB-1-AM and SR-101) in mouse V1. Five representative planes at different depths imaged with 3D AO scanning. Scale bar,  $100 \mu\text{m}$ . Depths are measured relative to the pia. (b) Example of an image plane at  $200 \mu\text{m}$  depth showing neurons (green) and glial cells (magenta and white). Scale bar,  $100 \mu\text{m}$ . (c) Image and intensity profiles of a pre-selected bright glial cell used to establish the measurement coordinate system. (d, Bottom)  $35 \mu\text{m}$  z-projection of the region marked in b. (d, Top), neuronal somata detected with the aid of an algorithm in a subvolume (shown with projections, neurons in white and glial cells in black). Scale bar,  $50 \mu\text{m}$ . (e) Maximal intensity side- and z-projections of the entire z-stack ( $400 \times 400 \times 500 \mu\text{m}^3$ ) with autodetected cell locations (spheres) color-coded in relation to depth. The set detection threshold yields 532 neurons. (f) Spontaneous neuronal network activity measured in the 532 cells in e. Left, Example of a raw trace in which each line corresponds to a cell. Spatially normalized traces (middle) and corresponding  $\text{Ca}^{2+}$  transients (right). (Source: Katona G. et al. 2012)

### IN VIVO MEASUREMENT OF NETWORK ACTIVITY

Population activity has long been studied in the visual cortex. We conduct *in vivo* two-photon imaging of cell assemblies in the V1 area by using bolus loading and genetic approaches.

Neuronal network responses are recorded during different visual stimuli. In addition, active cells are selected based on the previously recorded somatic activity and their dendritic responses are followed along with the network activity in three dimensions by using whole-cell patch clamp techniques.


## TWO-PHOTON UNCAGING

Two-photon uncaging takes advantage of the high spatial and temporal resolution of two-photon excitation to study dendritic integration, a postsynaptic mechanism. Used in combination with two-photon imaging, two-photon uncaging provides an opportunity to study the long-term structural and functional consequences of stimulation of structures such as dendritic spikes and dendritic spines. Besides performing experiments we develop new caging compounds and use these for our new measurements.

## IN VITRO 2D TWO-PHOTON MEASUREMENT OF NETWORK ACTIVITY (PPKE)

It is thought that sharp wave-ripples (SPW-R) activity is involved in the process of memory consolidation. We investigate spontaneous single cell neuronal activities during SPW-R in the hippocampus CA3 region under *in vitro* conditions. Fast spiking (FS), PV+ basket cells (BCs) as the clockworks for neuronal oscillations are important elements of hippocampal neuronal networks. Thus, we focus on PV+ interneurons to reveal the dendritic calcium dynamics during SPW-R. Recently we have extended our interest of these measurements with the principal, pyramidal neurons to the better understand of the spontaneous neuronal network activity.

To achieve this, we combine two-photon microscopy, local field electrophysiology, single cell electrophysiology, and dendritic patch clamp recordings. To measure the pharmacological background of calcium dynamics in single cell dendrites, we use focal synaptic stimulation and two-photon uncaging of novel, own developed glutamate and GABA caged compounds.

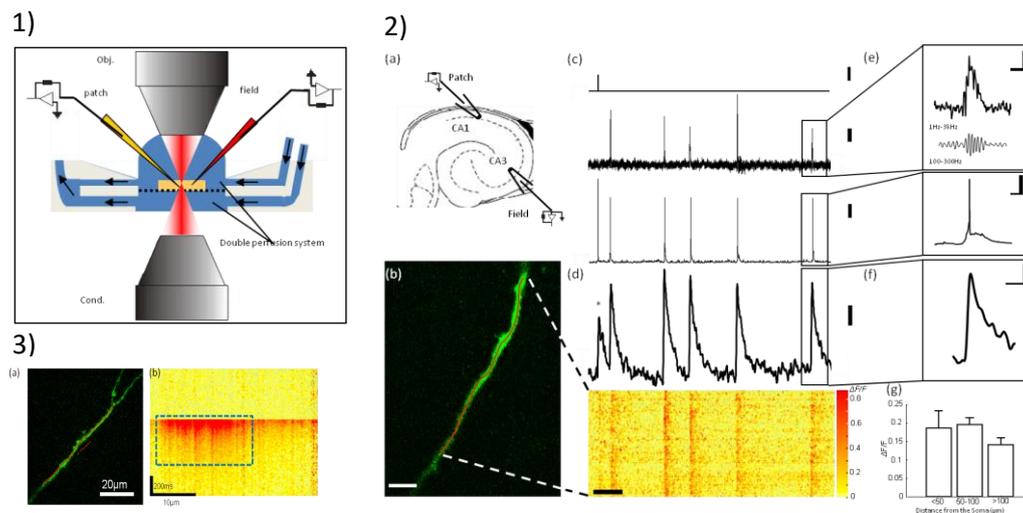

**Fig. 3** 1) Experimental arrangement to generate spontaneous network activity in *in vitro* conditions. 2) Simultaneous two-photon calcium imaging, whole cell patch clamp recording and local field potential recording in *in vitro* measurement. 3) Two-photon uncaging and calcium imaging. (Source: Chiovini B et al. 2010 *Neurochem Res.*)

## SELECTED PUBLICATIONS

- [1] Wolfgang G. Bywalez, et al. Electrical compartmentalization in olfactory bulb granule cell spines/Local postsynaptic sodium channel activation in olfactory bulb granule cell spines, *NEURON* 2014 (accepted for publication)
- [2] Chiovini B, Turi GF, Katona G, Kaszas A, Palfi D, Maak P, Szalay G, Szabo MF, Szabo G, Szadai Z, Kali S, Rozsa B, Dendritic spikes induce ripples in parvalbumin interneurons during hippocampal sharp waves, *NEURON* 82:(4) pp. 908-924. (2014)
- [3] Jan Tønnesen, Gergely Katona, Balázs Rózsa, & Valentin Nägerl (2014) Nanoscale spine neck plasticity regulates compartmentalization of synapses, *Nature Neuroscience*
- [4] Katona G, Szalay G, Maak P, Kaszas A, Veress M, Hillier D, Chiovini B, Vizi ES, Roska B, Rozsa B. Fast two-photon in vivo imaging with three-dimensional random-access scanning in large tissue volumes, *Nature Methods* 9(2):201-208, 2012
- [5] G. Katona, A. Kaszás, GF. Turi, N. Hájos, G. Tamás, E. S. Vizi, B. Rózsa. Roller Coaster Scanning Reveals Spontaneous Triggering of Dendritic Spikes in CA1 Interneurons, *PNAS* 108(5):2148-53, 2011
- [6] Holderith, N., Lorincz, A., Katona, G., Rózsa, B., Kulik, A., Watanabe, M., Nusser, Z. Release probability of hippocampal glutamatergic terminals scales with the size of the active zone, *Nature Neuroscience* 15(7), 988-997, 2012
- [7] Chiovini B, Turi GF, Katona G, Kaszás A, Erdélyi F, Szabó G, Monyer H, Csákányi A, Vizi ES, Rózsa B. Enhanced dendritic action potential backpropagation in parvalbumin-positive basket cells during sharp wave activity, *Neurochem Res.* 35(12):2086-95, 2010
- [8] A. Heinrich, G. Túri, B. Rózsa and B. Sperlágh. K<sup>+</sup> depolarization evokes ATP, adenosine and glutamate release from glia in rat hippocampus: a microelectrode biosensor study. *British Journal of Pharmacology*, 2012
- [9] Lorincz A\*, Rozsa B\*, Katona G, Vizi ES, Tamas G. Differential distribution of NCX1 contributes to spine-dendrite compartmentalization in CA1 pyramidal cells, (\*CONTRIBUTED EQUALLY), *PNAS* 104, 1033-8, 2007

## SELECTED PATENTS

*(Total number of international patents: 17)*

- [P1] B. Rózsa, G. Katona, P. Maák, M. Veress, G. Szalay (2012) Compensator system and method for compensating angular dispersion. *Patent#:* PCT/HU2012/000003
- [P2] B. Rózsa, G. Katona, F. Csikor, P. Maák Method for measuring a 3-dimensional sample via measuring device comprising a laser scanning microscope and such measuring device. *Patent#:* PCT/HU2012/000002
- [P3] B. Rózsa, G. Katona, P. Maák, M. Veress, B. Chiovini, G. Szalay, A. Kaszás, P. Mátyás Method for scanning along a continuous scanning trajectory with a scanner system. *Patent#:* PCT/HU2012/000001
- [P4] B. Rózsa, I.Gy. Csizmadia, Z. Mucsi, G. Szalay, A. Kaszás, Cs. L. Haveland, O. Majercsik, A. Potor, G. Katona, D. Gündisch, B. Chiovini (2011) Use of photo active compounds. *Patent#:* HU1100129-PCT Photoactive derivatives (2011) Patent# P1100550
- [P5] Rózsa B, Katona G, Vizi ES. Laser scanning microscope. Patents P0800686, E 08462010.3, PCT/HU2009/000096
- [P6] G. Katona, ES Vizi, B. Rózsa Laser scanning microscope for scanning along a 3D trajectory. Patent numbers: P0800433, E 08462010, PCT/HU2009/000057
- [P7] Rózsa B, Katona G, Vizi ES., Folded frame scanning. Patent numbers: P0800690, P0800782, PCT/HU2009/000095
- [P8] Rózsa B, Katona G, Kaszás A., Turi GF, Vizi ES., Method and measuring system for scanning multiple regions of interest. Patent numbers: P0800688, E 08462011, PCT/HU2009/000094

## 11. PROGRAMMABLE OPTICS

SZABOLCS TÖKÉS, Associate Professor; KRISTÓF IVÁN, Associate Professor

*Graduate students:* MÁRTON KISS, PÉTER LAKATOS

### WHAT IS PROGRAMMABLE OPTICS?

We are working in three aspects of **programmable optics**:


1. The first way is building embedded programmable optical/electro-optical processor systems. This research is peaking in programmable optical cellular wave computing.
2. Our second way is building equipment to digitally capture complex wave-fields, which are holograms and reconstruct the wave-field and 3D objects by wave propagating algorithms. We use highly parallel GPUs to produce real-time 3D reconstructions. Its main applications are in biological digital holographic microscopy (DHM).
  - a. We conduct research on compressed sensing digital holography.
  - b. Diffractive optical tomography is an extension of the DHM technology.
  - c. It is promising that infrared DHMs can look inside human tissues.
3. The third approach is combining fluorescence microscopy with the DHM technology, including femtosecond techniques.

All of these researches are complex interdisciplinary works requiring cooperation of several scientists and experts of different disciplines. Such fields are optics/electro-optics, electronics, mechanical/mechatronic engineering, computational/information technology, biological, medical ones.


The students and doctoral students of Pázmány and Semmelweis Universities are active participants of these projects. We work in cooperation with the Computer and Automation Research Institute of the Hungarian Academy of Sciences (MTA SZTAKI, <http://www.analogic.sztaki.hu/indexDHM.html>). We strive to find and solve cutting edge scientific and industrial problems. So far we are outstandingly successful in fluid imaging by DHMs. It already has industrial applications in the water industry, but its bio-medical and pharmacological applications are promising as well.

As it is commonly known, light-wave optical microscopy is a striking revival. Sub-wavelength super resolution, volumetric imaging, fluorescence imaging are developing in great steps forward. Optical coherence tomographic (OCT) microscopy has already find wide applications in medical diagnosis.

Some demonstrative images represent the programmable optics field's results:

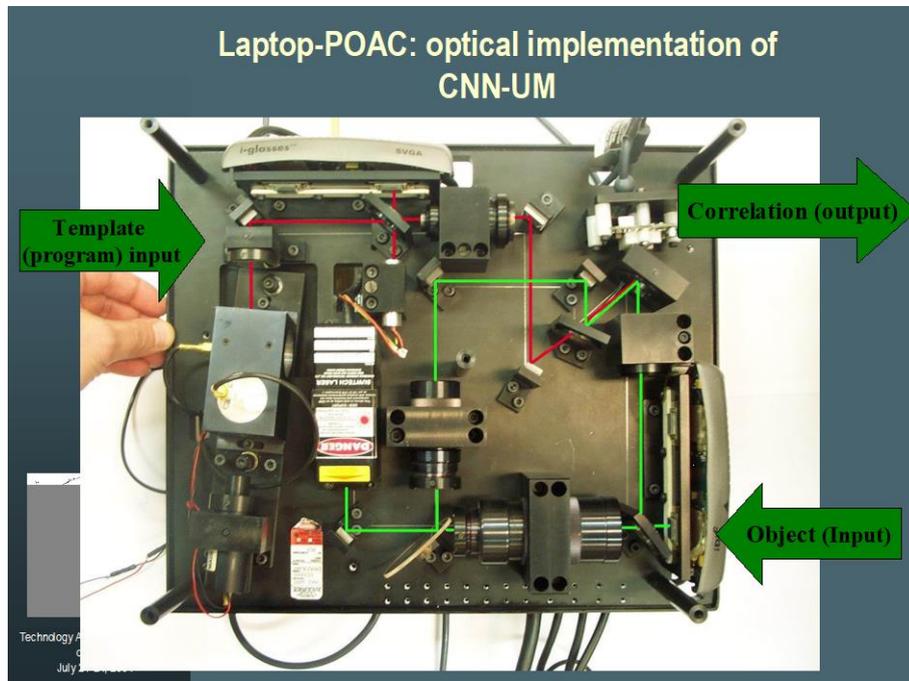

**Fig. 1** Laptop-POAC: optical implementation of CNN-UM

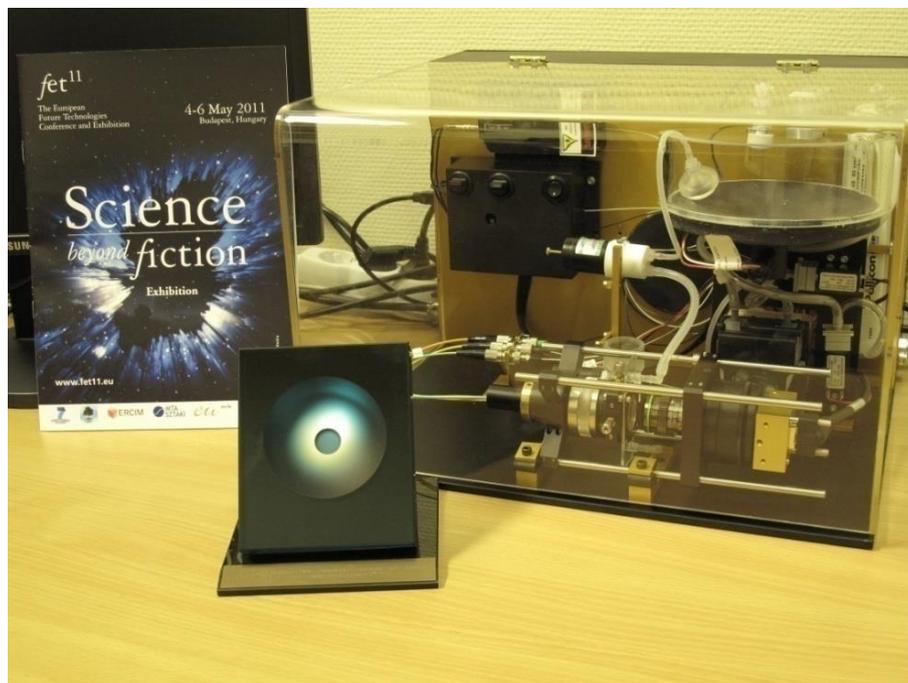

**Fig. 2** Multi color digital holographic microscope for monitoring microbiological water quality

## 12. MOVEMENT REHABILITATION

JÓZSEF LACZKÓ, Associate Professor; PÉTER SZOLGAY, Professor  
*Graduate students:* BENCE BORBÉLY, ZSOLT GYÖRFFI, ÁDÁM VÁLY

### MEDICAL REHABILITATION ACTIVITY OF THE LABORATORY

Research in the Movement Rehabilitation Laboratory deals with the questions how the nervous system interacts with parts of the body and the environment to produce well coordinated movements like reaching an object or transporting an object held in the hand. How practice, learning or fatigue does effect movement execution? How the central nervous system chooses particular solutions for a motor task that has theoretically an infinity of different solutions. Based on measured movements, we aim to reveal the contributions of muscle properties, limb geometry and neural activation in the control of limb movements.

Applying an ultrasound based movement analyzing system (ZEBRIS, Ivry, Germany) we record kinematic parameters of human movements. We place ultrasound emitting markers on anatomical landmarks of the body and record their position as function of time during human movements. Simultaneously we record muscle activities applying surface electromyograms (EMG) and we study muscle synergies.



**Fig. 1** *Investigating object moving arm motion with altered load in the hand (movement recording: muscle activity – movement kinematics)*


We measure and analyze multi-joint movements in able-bodied individuals and our aim is to apply our research in medical rehabilitation for people with movement disorders.

The goal of our research in the laboratory is to use biomedical engineering methods and biomechanics to investigate and understand how humans use and control their movements. The main motivation is to improve motor functions (e.g. limb movements) of people who live with movement disorders or disabilities. Beside this basic research our aim is to reactivate paralyzed muscles and to restore lost motor functions for people who suffered accidents or neurological disorders as stroke, spinal cord jury or other neural based movement

dysfunctions.

Based on measured and averaged kinematic parameters and muscle activities (Electromyograms) of able bodied people we define muscle activity patterns that can be applied for controlling functional electrical muscle stimulation (FES) for people with paralysed limbs. FES is a technique to generate muscle activities by transferring electrical signals to muscles via electrodes to evoke limb movements. In cooperation with the National Institute for Medical Rehabilitation and the Semmelweis University, we trained 20 spinal cord injured patients whose lower limbs were paralysed to perform cycling movements on a recumbent bike (ergometer) using their own muscles. Otherwise these people would not be able to generate active muscle forces.

A general interest of the laboratory is man-machine interface. This includes functional electrical stimulation but also motor control research that uses bioelectrical signals to control movements of body parts or external objects. We study how information can be changed between the human body and artificial instruments. Our research can be applied in neuromorphic control of prosthetic devices designed either for paralysed patients (neuroprostheses) or for amputees (artificial limbs). We work on applications that may adapt to their users.

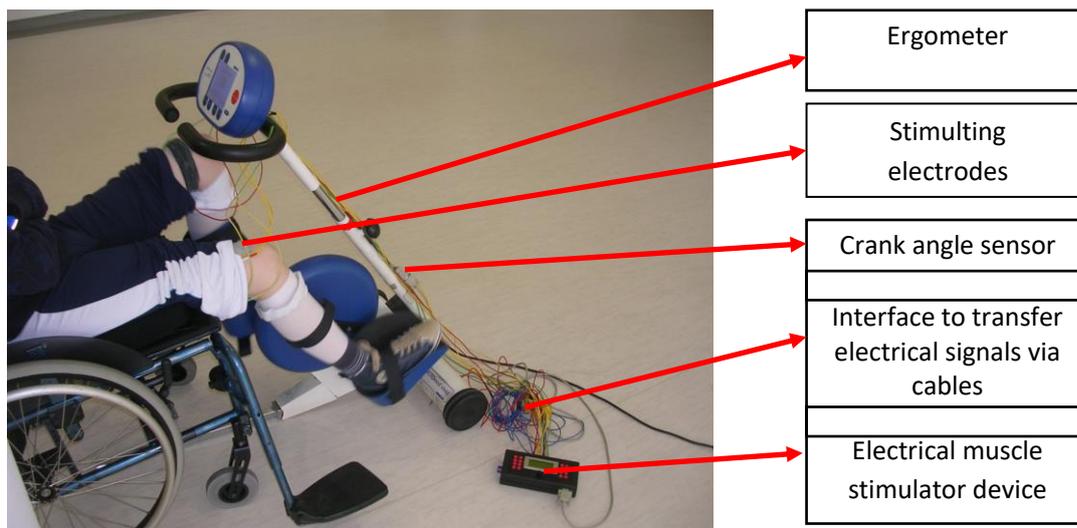

**Fig. 2** Training set up as paralyzed patients are cycling on an ergometer in the National Institute for Medical Rehabilitation using an 8 channel electrical stimulator device developed at the Pázmány Péter Catholic University.

## PUBLICATIONS

- [1] Katona P, Pilissy T, Tihanyi A, Laczko J (2014): The Combined Effect of Cycling Cadence and Crank Resistance on Hamstrings and Quadriceps Muscle Activities during Cycling. *Acta Physiologica Hungarica*, Volume 101 (4), pp. 505–516,
- [2] Laczko J, Katona P, Valy A. (2014): Muscle co-activation as function of crank angle when cycling on an ergometer with altered power output. Program No. 630.06, 2014 Neuroscience Meeting Planner. Soc. for Neuroscience
- [3] Tibold R, Laczko J. The effect of load on torques in point-to-point arm movements: a 3D model. *Journal of Motor Behavior*. Vol. 44 No.5. pp. 341-350, 2012
- [4] Laczko J., Borbely B, Fazekas G, Takacs J. The influence of movement speed on variances of target tracking arm movements using a computer mouse. In: *Annual Meeting of the Society for the Neural Control of Movement*, Poster Sessions, Full Abstracts P.68, 2012
- [5] Katona P, Pilissy T, Fazekas G, Klauber A, Laczkó J. A non-invasive method for the examination of muscle geometry to the exploration of the context of the muscle activities and muscle length changes. *Biomechanica Hungarica* III/1, pp. 101-105, 2010
- [6] Keresztényi, Z., Cesari, P., Fazekas, G., Laczkó, J. The relation of hand and arm configuration variances while tracking geometric figures in Parkinson's disease - "aspects for rehabilitation". *International Journal of Rehabilitation Res.*, 32. 53-63, 2009
- [7] T. Pilissy, A. Klauber, G. Fazekas, J. Laczkó, J. Szécsi. Improving functional electrical stimulation driven cycling by proper synchronization of the muscles. *Clinical Neuroscience / Ideggyogy Szle.*61(5-6) pp. 162-167, 2008
- [8] Laczko J. Katona P, Waszlavik E, Klauber A. Dependence of cycling performance on training time and stimulation frequency during FES driven cycling. *IFESS 2012, 17<sup>th</sup> Annual Meeting – Intl. Functional Electrical Stimulation Society*. pp. 448-451, 2012
- [9] Laczkó J Modeling of Human movements, Neuroprostheses. *Clinical Neuroscience / Ideggyogy Szle.*64(7-8) pp. 162-167, 2011
- [10] Tibold R, Fazekas G, Laczko J. Three-dimensional model to predict muscle forces and their relation to motor variances in reaching arm movements. *Journal of Applied Biomechanics*, 27, pp. 362-374, 2011
- [11] Laczkó J., Katona P., Klauber A. Rehabilitációs Eszközök Bénult Végtagok Funkcionális Elektromos Stimulációval Végzett Edzéséhez; *Magyar Sporttudományi Szemle* 2011/2, pp. 53-54, 2011
- [12] Laczko J, Pilissy T, Tibold R. Neuro-mechanical Modeling and Controlling of Human Limb Movements of Spinal Cord Injured Patients. *Proc. of the 2nd Intl. Symposium on Applied Sciences in Biomedical and Communication Technologies*. ISBN 978-80-227-3216-1. On CD Isabel 2009, File number: 285283, 2009



## 13. ULTRASOUND BIONIC TECHNOLOGIES


MIKLÓS GYÖNGY, Associate Professor

### LABORATORY OVERVIEW

The activities of the laboratory are primarily motivated by the current ability and future potential of ultrasound technology to help in the early diagnosis of cancer. The scope of the research is wide in the sense that fundamental as well as applied research is being conducted, the aim always being that these ends be integrated with each other. On the fundamental end of the spectrum, the question of how ultrasound images arise is studied. This activity is summarised in the next section of the document. One of the possible fruits of this research is the understanding of how the microstructure of various pathologies such as skin cancer is mapped to certain quantitative parameters and qualitative features on ultrasound images. This leads to research about how skin cancer can be diagnosed using ultrasound and what devices are suitable for this. Since this research is carried out in collaboration with the Department of Dermatology, a summary of this research can be found towards the end of this book, under the title “Ultrasound Technology in Dermatology” (pp. 76).

### MODELLING OF ULTRASOUND IMAGE FORMATION


Although many models exist for describing the formation of ultrasound images, the validation of these models is lacking in the literature. The laboratory has conducted research that suggests that based on histology slides, the first-order statistics of different ultrasound tissue types can be predicted [1]. More recently, it has shown that the ultrasound image produced by distributions of inanimate scatterers can be correctly predicted (Figure 1, [3]).

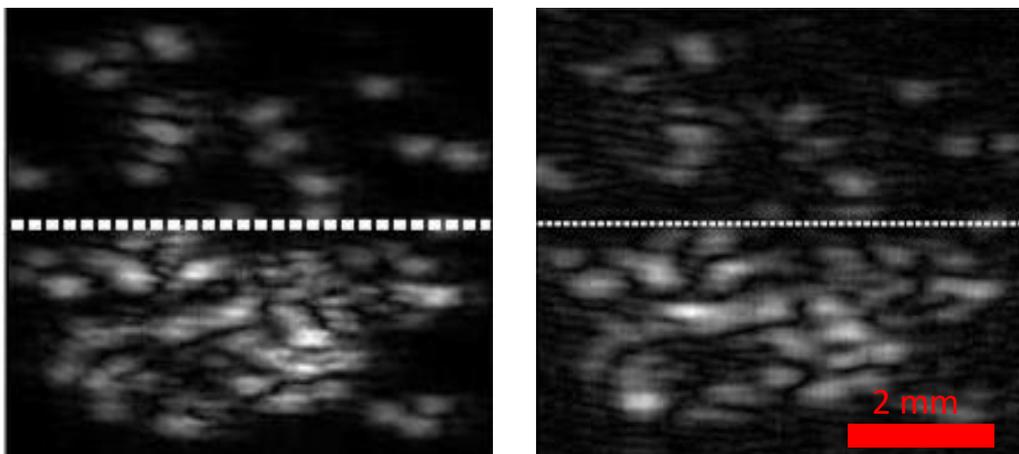

**Fig. 1** Comparison of simulated (left) and experimentally obtained (right) ultrasound images of a distribution of 49- $\mu\text{m}$ -diameter polystyrene microspheres. Note that – despite the presence of noise in the experimentally obtained image – the features of both images show substantial agreement with each other. This agreement is particularly interesting in the case of the speckle pattern seen in the bottom half of the images that is produced by a high concentration of interfering scatterers. Work with Ákos Makra [3].

The research of ultrasound scattering by inanimate scatterers helps two strands of research. Firstly, it is related to the aforementioned research of modelling scattering by tissue samples. This is helped by the recent construction of an acoustic microscope in our laboratory. Secondly, it allows the development of cost-effective and durable ultrasound phantoms that

can be used to calibrate ultrasound imaging systems (Figure 2).

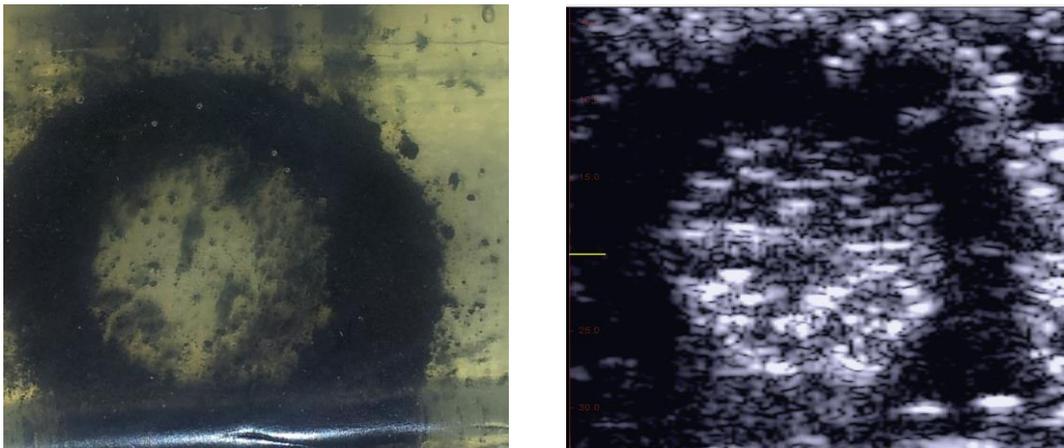

**Fig. 2** Comparison of photograph of PVC-based phantom (left) and resulting ultrasound image (right). The PVC phantom is loaded with graphite, which provides both optical and acoustic contrast. Note that the graphite forms a dense ring shape where the concentration of graphite is so high that the acoustic impedance distribution is relatively homogeneous, producing relatively low backscatter. In contrast, the area inside the ring is sufficiently heterogenous to provide high ultrasound backscatter.

*Work with Krisztián Füzesi.*

## PUBLICATIONS

- [1] M Gyöngy, L Balogh, K Szalai, I Kallo, Histology-based simulations of ultrasound imaging: methodology, *Ultrasound in Medicine and Biology* 39:(10), 1925-1929 (2013)
- [2] M Gyöngy, S Kollár, Variation of ultrasound image lateral spectrum with assumed speed of sound and true scatterer density, *Ultrasonics* 56, 370-380 (2014)
- [3] M Gyöngy, Á Makra, Experimental Validation of a Convolution-Based Ultrasound Image Formation Model using a Planar Arrangement of Micrometer-Scale Scatterers, *IEEE Transactions on UFFC* (under review)
- [4] J P Kemmerer, M L Oelze, M Gyöngy, Modeling of physically large weak scatterers in the beam of a single-element transducer, *Journal of the Acoustical Society of America* (under review)

## 14. MICROFLUIDICS AND POLYMER OPTOELECTRONIC TECHNOLOGIES

KRISTÓF IVÁN, Associate Professor; ANDRÁS J. LAKI, Postdoc

Graduate students: ESZTER TÓTH, GERGELY HUSZKA, NÓRA MARKIA, TAMÁS PARDY

### RESEARCH TOPICS


- Microfluidic device development, simulation and characterization for Lab-on-a-chip diagnostic purposes.
- Stand-alone microfluidic devices for sample preparation for disease diagnostics.
- Flow cytometric analysis of fluids and acoustic particle separators.
- 3D printing and novel thin-film polymer based rapid prototyping methods for diagnostic device manufacturing.
- Analysis and application of degas-driven flow for stand-alone portable diagnostic tests [1].
- Development of low-cost optical detection methods applicable for portable disease diagnostic polymer devices.

Ongoing research with applications of flow cytometry using hydrodynamic focusing of sample blood and analysis with high-fps camera computer system (EyeRIS) [2]. Application of this system for nematode filtering and counting for veterinary diagnostic process enhancement [3].


Strong collaboration with Hungarian MEMS fabrication facility of the HAS Research Centre for Natural Sciences on advanced microfluidic mixer structures for bioanalytical systems fully utilizing classical PDMS-glass based microfluidic device fabrication methods. Modeling, optimization, realization and characterization of herring-bone structures for enhanced mixing efficiency.

Acoustofluidic sample preparation methods applicable in soft structures. Blood cell filtering for plasma separation and biomarker detection. Separation of blood cells are based on their inherent acoustic compressibility which exerts a force on the cells/particles to move towards the acoustic nodal surfaces. Device simulation, realization and characterization for separation efficiency.


Fabrication process development and device characterization for thin-film layered microstructures for low-cost, self-powered biomedical diagnostic devices with integrated sample preparation.

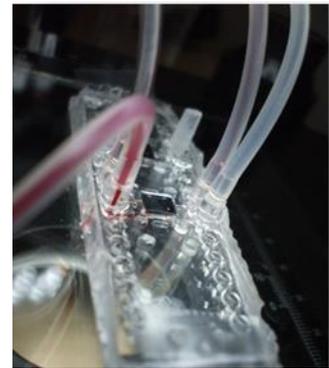

**Fig. 1** Microfluidic flow focusing device for cytometry

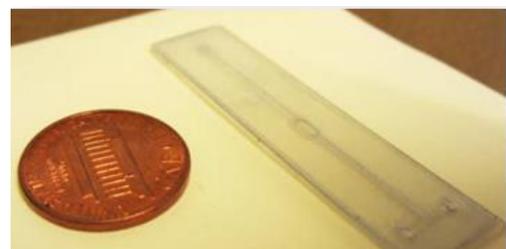

**Fig. 2** Acoustofluidic separator device for plasma extraction and biomarker detection

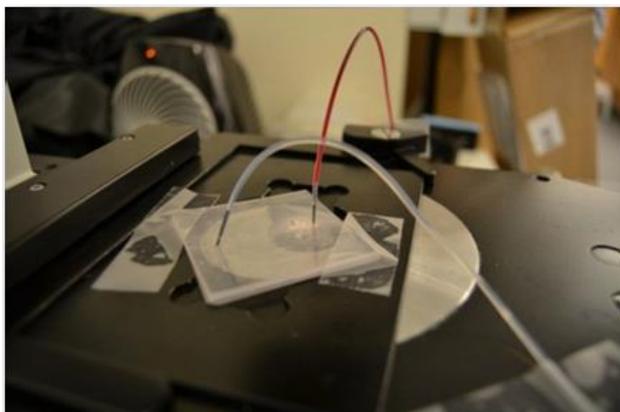

**Fig. 3** *Characterization of layered microstructures for biomedical sample preparation*

Development of low-cost laser diode and smartphone based detection schemes for biomarker analysis purposes to be used with self-powered layered-polymer based microfluidic chips.

#### PUBLICATIONS


- [1] J. R. Waldeisen, D. Mitra, J. Chen, K. Ivan, and Luke P. Lee. Understanding degas-driven flow in microfluidic devices, *Lab on a Chip*, submitted for publication.
- [2] A. Laki, I. Rattalino, F. Corinto, K. Ivan, D. Demarchi, and P. Civera, An integrated LOC hydrodynamic focuser with a CNN-based camera system for cell counting application, 2011 *BioCAS Conference*, pp. 301–304.
- [3] A. J. Laki, K. Iván, Z. Fekete, P. Fürjes and Pierluigi Civera. Filtration of Intravenous Cardiopulmonary Parasitic Nematodes Using a Cross-Flow Microfluidic Separator, *EMBL Conference on Microfluidics 2012*
- [4] M. Lei, B. Ziaie, E. Nuxoll, K. Iván, Z. Noszticzius, and R. A. Siegel. Integration of Hydrogels with Hard and Soft Microstructures, *Journal of Nanoscience and Nanotechnology*, vol. 7, no. 3, pp. 780–789, 2007

## 15. EXPERIMENTAL MATHEMATICS

BARNABÁS GARAY, Professor; MIKLÓS KOLLER, Assistant Professor; MIKLÓS RUSZINKÓ, Professor

### MATHEMATICAL ANALYSIS AND COMPUTATION

In collaboration with *Mauro Forti* and *Luca Pancioni* (both of Siena University), *Barnabás Garay* and *Miklós Koller* started an extensive research in explaining the emergence of long transient oscillations, i.e., of metastable patterns of periodic orbits in one--dimensional cellular neural networks with periodic boundary conditions and two--sided nearest--neighbor interconnections [6], [7], [8]. Oscillations of this type were observed in electrical circuit experiments performed in Siena and in Budapest.

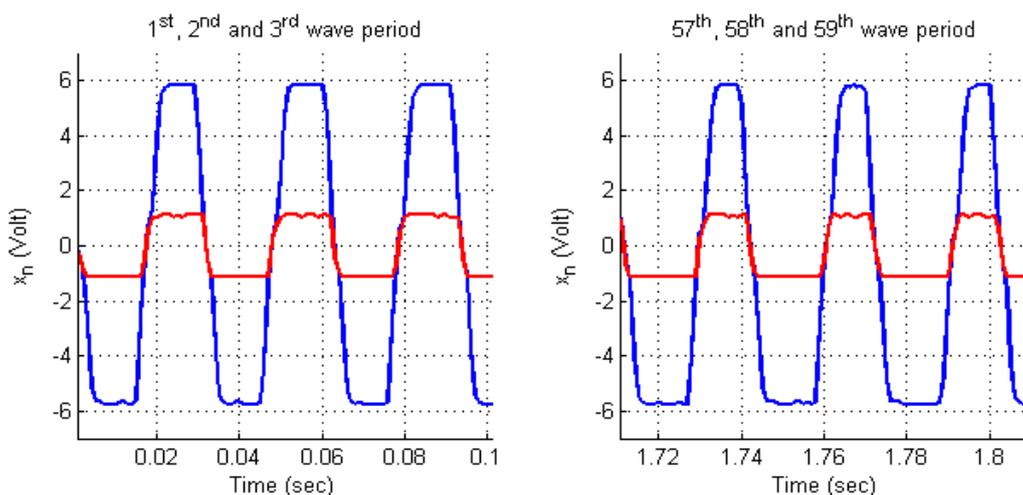

**Fig. 1** Case  $N=16$ . The metastable periodic rotating wave as shown on the oscilloscope. (Inner state in blue, output in red.) The circuit experiments were made in the bistable parameter region. The oscillation collapses after 74 wave periods and settles down suddenly to an asymptotically stable equilibrium.

The phenomenon is robust with respect to the non-idealities of the circuit implementation. The underlying mathematical model is the coupled system of differential equations

$$\tau \dot{x}_n = -x_n + \alpha \sigma(x_{n-1}) + \beta \sigma(x_{n+1}), \quad n = 1, 2, \dots, N$$

where the activation function is chosen for  $\sigma(x) = 2^{-1}(|x+1| - |x-1|)$ ,  $\tau$  is the time constant, and the variables  $x_0$  and  $x_{N+1}$  are identified with  $x_N$  and  $x_1$ , respectively. For a large domain of real parameters  $\alpha, \beta$ , the duration of the transient phase (as a function of  $N$ ) is exponentially long. Experimental and numerical findings were confirmed by analytic estimates on the Floquet eigenvalues of the periodic rotating wave with maximal symmetry.

Metastable and multistable behavior (which, for other parameter regions, is also present in the simple system of equations above) have an important role in Kelso's coordination dynamics modeling cognitive and decisional tasks performed by neurons and neural networks.

Barnabás Garay coauthored several papers on computer-assisted proofs including the one for chaos in the classical forced damped pendulum equation  $\ddot{x} + 0.1\dot{x} + \sin(x) = \cos(t)$  [9] and Vallis' conceptual model for El Niño, a variant of the Lorenz system without symmetry - a joint work with PhD student *Balázs Indig*, submitted. His research interest

includes dynamics on general networks as well [10].

## COMBINATORICS AND COMPUTATION

With their six joint papers in distinguished international journals, *Miklós Ruzinkó* is a regular collaborator of the 2012 Abel Prize winner, *Endre Szemerédi*. In all of these papers including [1], [2], a method called Szemerédi's Regularity Lemma has been used. For the first view, because of the enormous combinatorial bounds, this approach seems to be entirely 'out of the world'. On the other hand recent models in brain research suggest that maybe this approach can be useful in more applied topics as well.

One of the hot topics using methods from discrete mathematics is coding theory. During our research we improved several bounds on parameters of certain codes frequently used. Maybe our most important results in this area are those we got on bounds on codes for multiple access communication channels. Multiple access channel models usually assume a large number of non-cooperating users trying to get an access to the limited resources of a given channel [3]. Even more applied research is going on FPGAs [4], [5]. The attempt is to accelerate unstructured finite volume computations on FPGAs. The novelty in our investigations, with a larger group around *Péter Szolgay*, is that we are trying to combine algebraic non-elementary clustering methods to achieve a better computational performance.

## PUBLICATIONS

- [1] A. Gyárfás, M. Ruzinkó, G. Sárközy, E. Szemerédi. Partitioning, three-color Ramsey numbers for paths, *Combinatorica* 27:35-69, 2007
- [2] A. Gyárfás, M. Ruzinkó, G. Sárközy, E. Szemerédi. Partitioning 3-colored complete graphs into three monochromatic cycles, *Electr. J. Combinatorics* 18:1-16, 2011
- [3] A. Hiba, Z. Nagy, M. Ruzinkó, Memory access optimization for computations on unstructured meshes, *13<sup>th</sup> Int. Workshop on Cellular Nanoscale Networks and their Applications (CNNA)*, pp.1-5 (electronic), Turin, Aug. 2012
- [4] Z. Nagy, C. Nemes, A. Hiba, Á. Csík, A. Kiss, M. Ruzinkó, P. Szolgay, Accelerating unstructured finite volume computations on field-programmable gate arrays, *Concurrency and Computation: Practice and Experience* 26:615-643, 2014
- [5] A. Hiba, Z. Nagy, M. Ruzinkó, P. Szolgay. Data locality-based mesh-partitioning methods for data-flow machines, *14<sup>th</sup> Int. Workshop on Cellular Nanoscale Networks and their Applications (CNNA)*, pp.1-6 (electronic), Notre Dame, July 2014
- [6] M. Forti, B. M. Garay, M. Koller, L.Pancioni. An experimental study on long transient oscillations in cooperative CNN rings, *13<sup>th</sup> Int. Workshop on Cellular Nanoscale Networks and their Applications (CNNA)*, pp.1-6 (electronic), Turin, Aug. 2012
- [7] M. DiMarco, M. Forti, B. M. Garay, M. Koller, L.Pancioni. Multiple metastable rotating waves and long transients in cooperative CNN rings, *2013 European Conf. on Circuit Theory and Design (ECCDT)*, pp.1-4 (electronic), Dresden, Sept. 2013
- [8] M. Forti, B. M. Garay, M. Koller, L.Pancioni. Long transient oscillations in a class of cooperative cellular neural networks, *Int. J. Circuit Theory Appl.* 42: (online version appeared) 2014
- [9] B. Bánhelyi, T. Csendes, B. M. Garay, L. Hatvani. A computer-assisted proof of Sigma 3-chaos in the forced damped pendulum equation, *SIAM J. Appl. Dyn. Syst.* 7:843-867, 2008
- [10] B. M. Garay, A. Simonovits, J. Tóth. Local interaction in tax evasion, *Economics Letters* 115:412-415, 2012

## 16. SOFTWARE DEFINED ELECTRONICS AND VIRTUAL INSTRUMENTATION


GÉZA KOLUMBÁN, Professor

*Graduate students:* TAMÁS KRÉBESZ, CSABA JÓZSA

### ACTIVITY OF THE SDE-VI LAB, A BRIEF DESCRIPTION

Recent research topics of the Software Defined Electronics (SDE) and Virtual Instrumentation (VI) laboratory:

- **Reconfigurable physical layers**
  - Elaboration of CS-GCSK/GCS-DCSK modulation schemes
  - Derivation of analytical expression for the BER performance of these new modulation schemes
  - Elaboration of a step-by-step method for the derivation of detection algorithms assuring optimum solution for different applications
- **Application-oriented protocols for PHY layer**
  - Elaboration of UWB FM-DCSK protocol which improves by an order the coverage of the already published Gaussian UWB Impulse Radio (IR)
  - Elaboration of UWB Chirp IR TR protocol which improves by an order the coverage of Gaussian UWB IR but which preserves the channel dispersion suppression capability of Gaussian one
- **SDE conform BaseBand (BB) WND models**
  - Elaboration of a step-by-step method for the derivation of equivalent BB models of WLAN and BioMed devices
  - By integration of BB simulators into the SDE platform we have elaborated a software defined research platforms for the generation and analysis of real physical signals (see photo below)
- **Detection algorithms on GP-GPU platform suitable for WLAN applications**
  - We have shown that with appropriate parallel algorithms the GP-GPU platforms can be used to implement detectors
  - Elaboration of PSD algorithm which implements the ML detection on GP-GPU platform

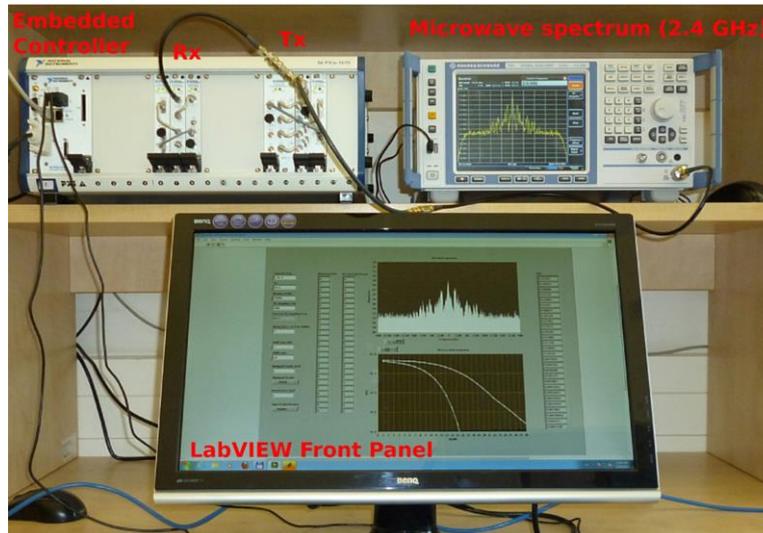

**Fig. 1** Photo of the PXI based SDE research and development platform installed in the SDE-VI lab. The “Embedded Controller” that is responsible for running the application software and controlling the modular units, the “Rx” unit that performs the transformation between the RF and baseband domains, and the “Tx” unit that performs the inverse transformation, are in the same PXI chassis. The “LabVIEW Front Panel” that appears on the PC monitor shows the graphical user interface of the software that is run by the “Embedded Controller”. The real physical signals generated by software are measured by a Rohde & Schwarz spectrum analyser.

## INTERNATIONAL RECOGNITION OF OUR LABORATORY

Our SDE-VI Lab has been playing a leading role worldwide in the research of software defined electronics. This leading role had been recognized by IEEE CAS Society and we were asked to write a tutorial on SDE for the IEEE CAS Magazine in 2012. See item [9] in the publications list. Our contribution to this area has attracted the attention of the scientific community even more. As a consequence Prof. Kolumbán has been elected as a speaker in the 2013-2014 Distinguished Lecturer Program (DLP) by the IEEE-CAS.

## DLP LECTURES DELIVERED BY PROF. KOLUMBÁN IN CHRONOLOGICAL ORDER:

### 2013:

1. "Software Defined Electronics: A New Research Field for the IEEE CAS Society," Guangdong University of Technology, April 09, 2013, Guangzhou, P.R. China.
2. "Software Defined Electronics: A Revolutionary Paradigm for RF Radio and Measurement Systems," A day-long short course organized by IEEE UK&RI Solid State Circuits Chapter, Tyndall National Institute, May 09, 2013, Cork, Ireland.
3. "Software Defined Electronics: A Revolutionary Design Paradigm for Automated Calibration and Test Systems," Beijing Jiaotong University, May 12, 2013, Beijing, P.R. China.
4. "Software Defined Electronics: A New Approach for Design and Implementation of Future Communications Systems," Short course at EAMTA, Facultad Regional Buenos Aires - Universidad Tecnológica Nacional, August 12 and 14, 2013, Buenos Aires, Argentina.
5. "Implementation of SDE-Based Universal RF Testbed and Derivation of Baseband

Equivalents," CAMTA Day, Facultad Regional Buenos Aires - Universidad Tecnológica Nacional, Buenos Aires, August 15, 2013 Buenos Aires, Argentina.

6. "Software Defined Electronics: A New Research Field for CAS Society," Tokushima University, December 04, 2013, Tokushima, Japan.
7. "Software Defined Electronics: A New Research Field for CAS Society," Meiji University, December 11, 2013, Tokyo, Japan.
8. "New Approach for Design and Implementation of Future Communications Systems," Tokyo University of Science, December 13, 2013, Tokyo, Japan.

**2014:**

1. "SDE: A Revolutionary New Approach for Design and Implementation of Future Communications Systems," Keynote talk at IEEE Intl. Symp. on Computer, Consumer and Control (IS3C), June 10, 2014, Taichung, Taiwan.
2. "Software Defined Electronics: A New Research Field for Circuits and Systems Society," Keynote talk at 12th IEEE NEWCAS Conference, June 24, 2014, Trois-Rivieres, Canada.
3. "Software Defined Electronics (SDE): A New Approach for Design and Implementation of Future Communications Systems," Short course at Universidade do Estado do Rio de Janeiro (UERJ), August 15, 2014, Rio de Janeiro, Brazil.
4. "Software Defined Electronics: A Revolutionary Change in Design Paradigm of RF Radio and Measurement Systems," Tutorial at International Telecommunications Symposium (ITS), August 17, 2014, Saõ Paulo, Brazil.
5. "Software Defined Electronics (SDE): A Revolutionary Change in Design Paradigm of Radio and RF Measurement Systems," Short course at Inha University, September 23, 2014, Incheon, Korea.
6. "Software Defined Electronics (SDE): A Revolutionary Change in Design Paradigm of RF Radio and Measurement Systems," Plenary talk at 14th Intl. Symp. on Communications and Information Technologies, September 24, 2014, Incheon, Korea.
7. "Software Defined Electronics: A Revolutionary New Paradigm for the Research and Design of Future Communications and Measurement Systems," Seminar at City University of Hong Kong and The Hong Kong Polytechnic University, October 10, 2014, Hong Kong.
8. "Software-Defined Electronics: A New Research Field for CAS Society," Half-day tutorial at NORCHIP 2014, October 27, 2014, Tampere, Finland.
9. "New Approach for Design and Implementation of Future Communications Systems," Keynote speech at Intl. Symp. on System-on-Chip (SoC), October 28, 2014, Tampere, Finland.

**PUBLICATIONS**

- [1] Csaba Máté Józsa, Géza Kolumbán, Antonio M Vidal, Francisco J Martínez-Zaldívar, Alberto González: Parallel Sphere Detector algorithm providing optimal MIMO detection on massively parallel architectures, *Elsevier, DSP 2014* (accepted)
- [2] Géza Kolumbán, Tamás Krébesz, Chi K Tse, Francis C M Lau: Turn your baseband Matlab simulator into a fully functional, 2.4-GHz, operating FM-DCSK transceiver using SDE platform, In: *Proceedings of the European Conference on the Circuit Theory and Design 2013*

- [3] Géza Kolumbán, Tamás Krébesz, Chi K. Tse, and Francis C.M. Lau: Basics of Communications Using Chaos, Chaotic Signals in Digital Communications -*Electrical Engineering & Applied Signal Processing Series*, October 25, 2013 by CRC Press
- [4] Tamás Krébesz, Géza Kolumbán, Francis C M Lau, Chi K Tse: Application of universal software defined PXI platform for the performance evaluation of FM-DCSK communications system, *Proceedings of the European Conference on the Circuit Theory and Design 2013*
- [5] Weikai Xu, Lin Wang, Géza Kolumbán: A New Data Rate Adaption Communications Scheme for Code-Shifted Differential Chaos Shift Keying Modulation, *International Journal of Bifurcations and Chaos*, No.7, Vol.22
- [6] Géza Kolumbán, Tamás Krébesz, Chi K. Tse, Francis C M Lau: Improving the coverage of ultra wideband impulse radio by pulse compression, In *Proc. 2012 IEEE International Symposium on Circuits and Systems*
- [7] Géza Kolumbán, Tamás Krébesz, Chi K. Tse, Francis C M Lau: Implementation of FM-DCSK modulation scheme on USRP platform based on complex envelope, In *Proc. 2012 International Symposium on Nonlinear Theory and its Applications*
- [8] Géza Kolumbán, Tamás Krébesz, Francis C M Lau, Chi K. Tse: Performance Comparison of UWB Chirp IR TR and UWB FM-DCSK TR Systems Implemented with Autocorrelation Receiver, In *Proc. 2012 International Symposium on Nonlinear Theory and its Applications*
- [9] Géza Kolumbán, Tamás Krébesz, Francis C M Lau: Theory and Application of Software Defined Electronics: Design Concepts for the Next Generation of Telecommunications and Measurement Systems, *IEEE CIRCUITS AND SYSTEMS MAGAZINE* (ISSN: 1531-636X) 12:(2) pp. 8-34.
- [10] Tamás Krébesz, Géza Kolumbán, Csaba Máté Józsa: Ultra-Wideband Impulse Radio Based on Pulse Compression Technique, In *Proc. 20th European Conference on Circuit Theory and Design (ECCTD 2011)*
- [11] W. K. Xu, L. Wang, Géza Kolumbán: A Novel Differential Chaos Shift Keying Modulation Scheme, *International Journal of Bifurcation and Chaos*
- [12] Tamás Krébesz, Géza Kolumbán, Csaba Máté Józsa: Exploiting pulse compression to generate an IEEE 802.15.4a-compliant UWB IR pulse with increased energy per bit, In *Proc. 2011 IEEE International Conference on Ultra-Wideband (ICUWB)*
- [13] Tamás Krébesz, Csaba Máté Józsa, Géza Kolumbán: New Carrier Generation Techniques and Their Influence on Bit Energy in UWB Radio, In *Proc. 20th European Conference on Circuit Theory and Design (ECCTD 2011)*

## 17. ARTIFICIAL INTELLIGENCE AND SPATIAL-TEMPORAL SEMANTICS

KRISTÓF KARACS, Associate Professor

*Graduate students:* MIHÁLY RADVÁNYI, ATTILA STUBENDEK, ANNA HORVÁTH, GÁBOR ORBÁN

### FOCUS OF THE LABORATORY

The lab mainly deals with intelligence problems related to sensory processing. As sensors have become miniaturized and ubiquitous in modern information technology, remotely processing all acquired data is not feasible any more. Remote does not necessarily refer to the cloud, but in this sense another processor, or even the other side of the same topographic processor, may also count as a remote location. Local processing requires appropriate knowledge and architectural organization. A key principle we developed is semantic embedding that refers to the process of injecting background information into the hierarchical recognition process at appropriate levels.

### RESEARCH TOPICS

#### **I. Scene understanding of 3D scenes**

We consider 2D image flows containing the projection of 3D environments with other related information from other modalities. Specific scenes are described using a multimodal semantic language including spatiotemporal events, signatures of canonical views of typical objects, as well as spatial relationships of the objects and/or events. Semantic embedding during the recognition process is built on the knowledge in this representation.

The most important applications are autonomous local navigation and orientation tasks, either for personal or robot navigation. We developed a mobile framework for cell phones that serves as a basis for a guide helping blind and visually impaired people in their daily tasks.

# Overview of Jedlik Laboratories



## II. Visual learning

Recognizing objects in a visual environment is a nontrivial task mainly because of the huge number of looks (imprints) how an object can be perceived from different viewpoints under various lighting conditions. Visual learning aims to find characteristic signatures (features and feature groups) that are invariant to rotation across multiple scales and adaptive clustering methods that are able to identify which signatures belong to the same, and which ones to different semantic categories.

## III. Offline handwriting recognition

Recognition of handwritten cursive scripts is a much more difficult task than optical character recognition. The latter already has widespread commercial solutions, but the former is still an actively researched area. The main difference between the two fields is besides the fact that letter shapes greatly depend on individual writers is that touching characters pose a much more complex recognition scheme due to their ambiguous separation borders.

Semantic embedding is realized through a holistic word recognition technique that detects features on the word level without binding them to characters and a special linguistic engine that can find all proper linguistic forms that match a given holistic description.

## PUBLICATIONS

- [1] B. Varga, K. Karacs. Towards a Balanced Trade-off Between Speed and Accuracy in Unsupervised Data-Driven Image Segmentation, *Machine Vision and Applications*, Springer, DOI: 10.1007/s00138-013-0503-3, to appear, 2013
- [2] B. Varga, K. Karacs. High Resolution Image Segmentation using Fully Parallel Mean Shift, *EURASIP Journal on Advances in Signal Processing*, Special Issue on Multispectral and Hyperspectral Image and Video Processing, Springer, vol. 2011:111, DOI:10.1186/1687-6180-2011-111, 2011
- [3] Z. Solymár, A. Stubendek, M. Radványi, K. Karacs. Banknote Recognition for Visually Impaired, in *Proc. of the 20th European Conference on Circuit Theory and Design (ECCTD 2011)*, Linköping, Sweden, 2011
- [4] M. Radványi, K. Karacs. Navigation through Crosswalks with the Bionic Eyeglass, in *Proc. of 3rd International Symposium on Applied Sciences in Biomedical and Communication Technologies (ISABEL 2010)*, Rome, Italy, 2010
- [5] K. Karacs, Gy. Cserey, Á. Zarándy, P. Szolgay, Cs. Rekeczky, L. Kék, V. Szabó, G. E. Paziienza and T. Roska, Eds. *Software Library for Cellular Wave Computing Engines*. [Online] Available: [http://cnn-technology.itk.ppke.hu/Template\\_library\\_v3.1.pdf](http://cnn-technology.itk.ppke.hu/Template_library_v3.1.pdf), Jan. 2010
- [6] K. Karacs, G. Prószéky, and T. Roska CNN algorithms with spatial semantic embedding for handwritten text recognition, *International Journal of Circuit Theory and Applications*, vol. 37, no. 10, pp. 1019–1050, 2009



## 18. SENSING-ACTUATING ROBOTICS

GYÖRGY CSEREY, Associate Professor

Graduate students: SÁNDOR FÖLDI, NORBERT SÁRKÁNY

### LATEST RESULTS


This approach presents a new and low cost 3D optical compliant tactile sensor that is capable of measuring a threeaxial directional force component as well as an incipient slip. The tactile sensor is composed of a hollow compliant convex surface made of silicon rubber placed on a three photodiode and an infra LED based sensor array arranged in a reflective configuration. Any force applied onto the convex surface will cause a deformation that will change the reflected amount of light to the photodiodes causing their output to change according to the applied force vector. Due to the optical method of measurement, the proposed sensor offers a highly dynamic sensory range, low noise, and high speed operation (kHz range). Experimental results demonstrate accurate contact point, force magnitude and force incidence angle detection.

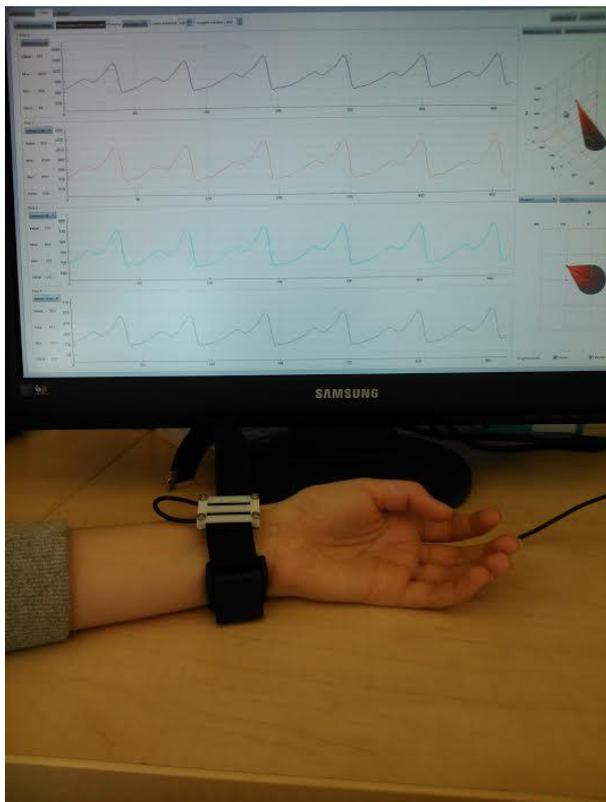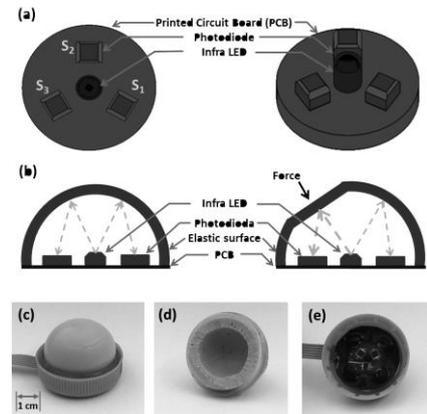

The principle of pulse diagnosis is that the vascular system is connected to all inner organs and, by this, carries information about them. This information can be read from the propagation of pulse wave, the so called pulse characteristic. This pulse wave is usually measured on the radial artery. With the help of this method some cardiovascular and inner organ diseases could be diagnosed by only one examination. The basics of this method were introduced in the Traditional Chinese Medicine. The main disadvantages of the traditional method are the following: it's really hard to learn, and it's also subjective, the accuracy of diagnosis depends on the qualifications and concentration state of the practitioner. This is why an objective, automatized pulsediagnostics system is required. In our laboratory we try to develop an automatized pulse diagnostic system based on our 3D tactile sensors, which was also developed here. Using this sensor, the pulse waveform

can be measured non-invasively, without pain and side effects on the radial artery at the wrist. We have a clinical TUKÉB license to make our measurements, record information of participants and publish our results.

Capsule endoscopy is a completely painless, non-invasive procedure, which gives the doctor images, similar in quality to those of conventional endoscopic techniques, of the gastrointestinal tract, including the esophagus and the whole small and large intestine. During development a 3D printed model of the intestine, obtained from a CT scan, was used in a robotics environment as a trajectory for the capsule to be led along by an automated algorithm. Our purpose was to improve and to automate the movement mechanism of the capsule, so that it could be moved to its appointed position and tilted by a given angle (with the speed of conventional endoscopic techniques). In our case the whole intestinal tract is monitored during a given trajectory, further on the capsule is expected to be able to examine selected regions in more detail, if needed. One of our long-term aims is to enable the user to control the capsule with the device from another room in real time via a robotic hand.

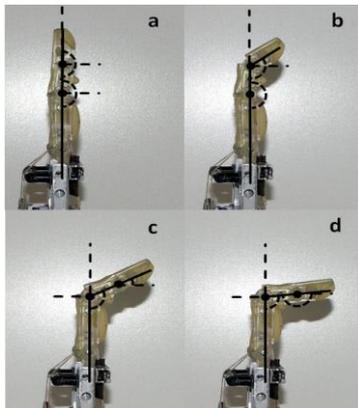

This work presents a design of an anthropomorphic biomechatronic hand, focusing on the design of the fingers and its bio-inspired flexor-extensor like low-level control. The kinematic description, the detailed explanation and presentation of the 3D CAD design are included. The description of the applied 3D tactile and magnetic sensors is also detailed in the article. Matlab simulation results and also the first experiments of the hardware prototype gave promising results and show that the approach can be an effective solution for the need of a hand-like actuator in robotics.

## PUBLICATIONS

- [1] Gábor János Tornai, György Cserey: Initial condition for efficient mapping of level set algorithms on many-core architectures, *EURASIP Journal on Advances in Signal Processing* 2014: (30) pp. 1-11. Paper 10.1186/1687-6180-2014-30.
- [2] József Veres, György Cserey, Gábor Szederkényi: Bio-inspired backlash reduction of a low-cost robotic joint using closed-loop-commutated stepper motors, *Robotica* 31: (5) pp. 789-796.2013.
- [3] Gábor János Tornai, György Cserey, Ion Pappas: Fast DRR generation for 2D to 3D registration on GPUs, *Medical Physics* 39: (8) pp. 4795-4799. 2012.
- [4] Miklós Koller, György Cserey: Spatial-temporal active wave computing using infrared proximity array, *International Journal of Circuit Theory and Applications* 40: (12) pp. 1209-1218 2012.
- [5] Ákos Tar, György Cserey: Object Outline and Surface-Trace Detection Using Infrared Proximity Array, *IEEE Sensors Journal* 11: (10) pp. 2486-2493. 2011.

## 19. MOBILE SENSING NETWORKS

ANDRÁS OLÁH, Associate Professor; KÁLMÁN TORNAI, Assistant Professor; ISTVÁN REGULY, Postdoc

*Graduate students:* DÁVID TISZA

### INFRASTRUCTURE OF THE WIRELESS SENSOR NETWORKS LABORATORY

USRP sw radios, Xbow Mica development kits, TI CC2420 development kits, Amber AMB8423 wireless target boards, sensors


### ACTIVITIES

One of the central issues in the development **Wireless Sensor Networks** (WSNs) is to devise new protocols under the constraint of limited resources (e.g. energy, size, available bandwidth, computational power...etc.). The most important characteristics of WSN are as follows:

- since the sensors are installed over a large area, a direct link between the information source and destination does not exist, hence the communication protocols to be developed have to support reliable multi-hop operation;
- sensor nodes needs only a low data rate (LR) communications link where some latency time is tolerated;
- channel conditions including both the propagation conditions and inner and outer radio interference (coexistent wireless system) are varying continuously;
- ultra low power consumption: using the same AAA battery, one node should operate for at least a few years, since regular maintenance (including battery changing) would make the system impractical.

As opposed to traditional networking protocols, these limitations pose new challenges to algorithmic protocol design. A great deal of researches has been pursued into developing novel communication protocols and distributed signal processing algorithm.

In our earlier research, we have developed several novel routing and MAC protocols which significantly increased the lifespan of the WSN under constraint of reliable packet reception at the BS (e.g. correct packet arrival at the BS is guaranteed by a given probability). These protocols were adapted and implemented in our test network.

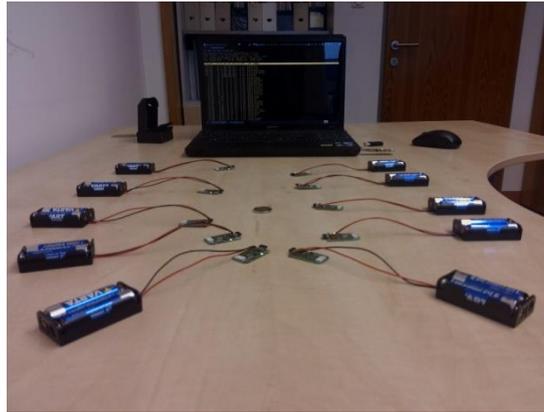

**Fig. 1**      *The AMB8423 development kit*

Our WSN group has a seven-year experience in research and development. The corresponding projects, education activities are as follows:

- *Development and Implementation of Wireless Indoor Climate Monitoring System* (completed project with EnerG Kft. sponsored by Hungarian Scientific Research Fund)
- *Signal processing and wireless device design and prototyping for analog sensors* (currently running project for Research Institute for Technical Physics and Materials Science (MFA) of the Hungarian Academy of Sciences)
- In the recent years we have published book chapters, journal papers and conference papers in the field.
- In this area 4 PhD were awarded and 2 PhD students are just before the thesis defense and more than 15 BSc and MSc students were working on the field.
- Recently we have developed a WSN based survivor detection system which is going to be implemented in AMB8423 wireless boards.

## 20. MICROELECTRONIC SYSTEMS AND INTEGRATED CIRCUITS

FERENC KOVÁCS, Professor; PÉTER FÖLDESY, Associate Professor

Graduate students: ZOLTÁN KÁRÁSZ, DOMONKOS GERGELYI, LÁSZLÓ KOZÁK, ANNA MEDGYESI, ÁDÁM LUTZ


### FOCUS OF THE GROUP

- Application of advanced microelectronic technologies to sense, measure, and process physical and biological electrical phenomenon.
- Microwave and Terahertz range sensing and imaging
- Integrated circuit Neural interfaces

The group has a long time experience in deep submicron integrated circuit (IC) design. We conduct research in a field, in which the physical quantities are hardly measurable with off-the-shelf components. Hence, the need for custom designed integrated circuits is unavoidable. Our group is the only academic team in Hungary with daily routine of using advanced IC technologies.

We have participated in several international grants targeting integrated vision systems. One of the most promising directions is the usage of 3D technology to merge image sensing, multi processor image analysis, and high level target recognition and identification in a single IC. The used 3D SOI technology is provided by the MIT Lincoln Laboratory and supported by the Office of Navy Research to form an integrated three layer compact vision system for UAV (unmanned aerial vehicle) surveillance and reconnaissance.


Through cooperation with MTA Research Centre for Natural Sciences and Institute of Microelectronics of Seville, Spain we are developing a complex, multi channel neural sensor interface using very low noise BiCMOS technology. Flexible deep brain electrodes with electrically selectable sensors and integrated amplifiers open new possibilities in understanding low frequency behavior of the brain, long term memory, and adaptation processes.

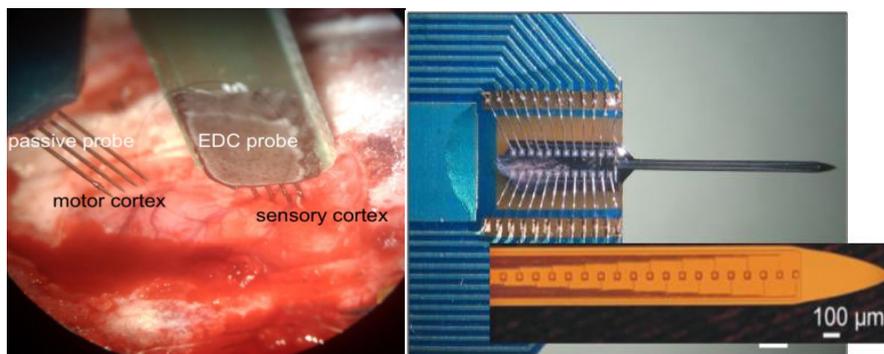

**Fig. 1** Brain electrodes with multiple contacts.


We also work with very high frequency electromagnetic waves. In the recent decade, the so called Terahertz (>300 GHz) waves come into the center of attention as the last unutilized region of the electromagnetic spectrum. This radiation is not ionizing, hence, in principle does

not harm living tissues, meanwhile provides information of material, moisture, biomarker content undetectable by other non invasive methods. We are a leading group in highly integrated CMOS sub-THz imagers.

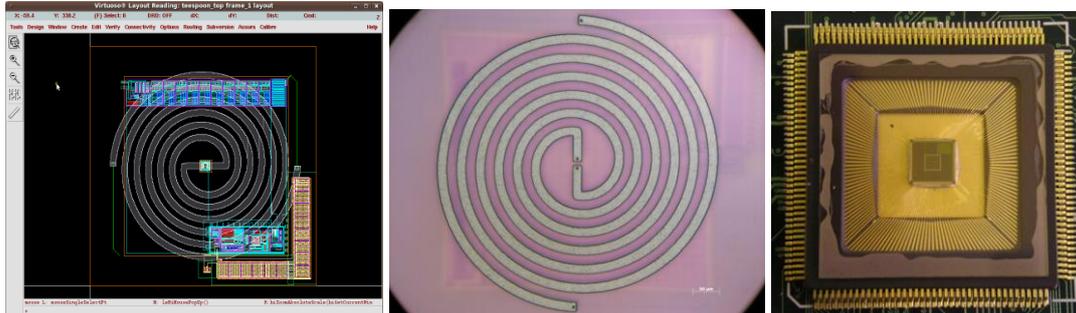

**Fig. 2** Different stages of development of a sub-THz imager: design, microphoto, and complete IC.

Beside theoretical work and consequent development, we focus as well on real life THz applications, such as skin cancer diagnostics in cooperation with Semmelweis University.

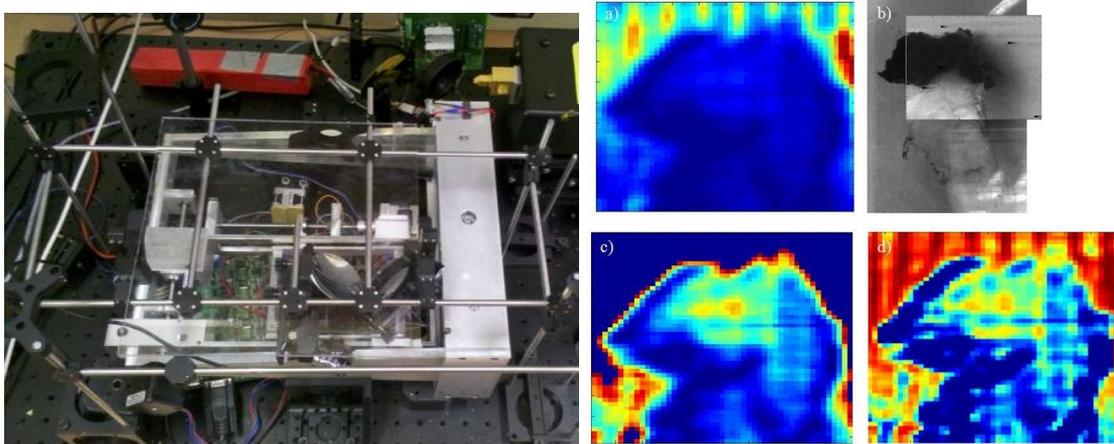

**Fig. 3** Experimental skin scanner and in vitro sample images captured at 460 GHz.

## PUBLICATIONS

- [1] P. Földesy. Terahertz single-shot quadrature phase-shifting interferometry, *Optics Letters*, Vol. 37, Issue 19, pp. 4044-4046, 2012
- [2] P. Földesy, Z. Fekete, T. Pardy, D. Gergelyi. Terahertz Spatial Light Modulator with Digital Microfluidic Array, *26th Eurosensors Conference*, September 9-12, 2012, Kraków, DOI: 10.1016-j.proeng.2012.09.307
- [3] P. Földesy, A. Zarandy. Integrated CMOS sub-THz imager array, *13th International Workshop on Cellular Nanoscale Networks and their Applications (CNNA)*, pp. 1–4, August 29-31, Turin, Italy, 2012
- [4] P. Földesy, Á. Zarándy, Cs. Rekeczky. Configurable 3D-integrated focal-plane cellular sensor–processor array architecture, *International Journal of Circuit Theory and Applications*, Vol. 36 (5-6), pp. 573-588, 2008
- [5] P. Földesy, Á. Zarándy, Cs. Rekeczky, T. Roska. Digital implementation of cellular sensor-computers, *International journal of circuit theory and applications*, Vol. 34 (4), pp. 409-428, 2006

## 21. PROGRAMMING LANGUAGES AND SOFTWARE TECHNOLOGY

JUDIT NYÉKYNÉ GAIZLER, Associate Professor; ISTVÁN VETŐ, Associate Professor; GERGELY FELDHOFFER, Assistant Professor

### PROGRAMMING LANGUAGES

The importance of reliability of the programs has come to the centre of interest with the development of large systems. The aim is to write "correct" programs which exactly perform their tasks, as defined by the requirements of the specification.

A theory, i.e. a methodology which supports the programmer perform his practical work to be well-considered is very important. Abstraction - as a technique of thinking - is substantial in the education of professional programmers of the future. In the same time, we have to agree with Bertrand Meyer that the "language independent methodology" is "as useful as a bird without wings", and: "In software perhaps more than anywhere else, thought is inseparable from its expression. To obtain good software, a good notation is not sufficient; but it is certainly necessary." That's the reason why we try to balance in our teaching already at BSc level between methodology and tools – programming languages, environments, etc.

Algorithm and software correctness are often discussed and educated separately. We look for ways to blend concepts as weakest precondition into the use of debuggers and static analyzers. Usual solutions like precondition assertion by logic-error exceptions and its analysis by debugger are part of our MSc education program.

### GPU SUPPORT IN COMPILERS

There are quite a number of research and development projects on GPU programming in these years since the raw computational power of GPUs is in general higher than CPU by a magnitude. Most of the publications in this topic used to describe the application of a given algorithm to GPU architecture. The problem of algorithm application to a given architecture contains multiple layers of abstraction. The higher level of abstraction used to describe the parallelization scheme, and the lower level is the actual GPU code which determines the memory mapping (coalescing), the use of shared memory, CPU-GPU transfer, etc. Solutions of lower level abstraction tasks are often commonly known as best practice on the given problem. This situation is similar to low level CPU programming techniques, which are today highly automated in optimizers used by compilers. Our concept is to introduce a compiler which is capable to generate GPU enabled code from standard high level programming language.

A GPU enabled compiler should generate GPU code, such as OpenCL, which is a high level programming language. It should take care of memory transfer and representation. We succeed to create a proof-of-concept compiler plugin which is capable of these features, and is integrated into GCC. The higher level of abstraction is encoded here as a lambda function which is a C++ feature in the latest standard. The programmer has to use a custom template function library to access the GPU features in this version. Each template function represents a high level parallelization scheme, such as `for_each()` or `cumulate()`. The supported features inside the lambda function include (non-recursive) function call, operator overloading, and many more. Examples of not supported features are the recursion, polymorphism and pointer

aliasing based tricks.

## SOFTWARE TECHNOLOGY

The category of Software Technology includes different disciplines, related to each other, but having its own specialties. The staff of PPCU Faculty of IT carries on numerous theoretical works on the fields of sciences concerned by the following subjects, included in the education program at our Faculty:



**Basics of software technology:** requirements engineering, software development processes and methodologies, project planning, basic questions of software quality and standards.

**Software design and** software design and design, modeling tools development Programming, SCRUM, configuration of software systems.



**evaluation:** methods and tools for implementation, OO analysis and and practices, agile software methodology (Extreme etc.), software reengineering, management, as well as evaluation



**Integration of information systems:** disciplines of integrated information systems, models and architectures, classes and handling of heterogeneity, the goals of integration, systems integration strategies, types of integration, middleware and integration standards, integration architectures, like SOA.

**Design patterns:** Types and role of the classical OO design patterns in Java and C++, architectural patterns in software development.



Our activity is extended to study the architecture, structure and functions of complex data processing application systems, like ERP, CMS and different types of eBusiness software. We are also dealing with the standards and tools of Business Process Modeling.

## PUBLICATIONS

- [1] A. Rák, G. Feldhoffer, G. B. Soós, and Gy. Cserey. Standard C++ Compiling to GPU with Lambda Functions, In *Proceedings of 2010 International Symposium on Nonlinear Theory and its Applications (NOLTA 2010)*, Krakow, Poland, 2010


## 22. DATA MANAGEMENT, DATA MINING AND MEDIA TECHNOLOGIES FOR COMMUNITIES

GERGELY LUKÁCS, Associate Professor; GYÖRGY TAKÁCS, Professor  
*Graduate students:* MÁTYÁS JANI, MÁRTON HUNYADY

We are working on laying the foundations for small community media using the latest available technologies such as smartphones, the mobile internet, big data and data mining. The primary goal is strengthening viable communities, supporting their self-organization on a practical level and promoting community members' mental health. Multidisciplinary cooperation with media experts, sociologists and psychologists as well as close cooperation with several communities allow us to concentrate on the technical issues while also focusing on our primary goal.

Technically, the following areas are covered:


- i. Audio data, i.e. speech and music play a central role in our approach. New challenges, such as mixed speech and music playlist generation are to be met (pure music playlist generation has been extensively handled over the past few years in the IEEE and ACM literature). There is also cooperation with the human language technology group.
- ii. Database management and data mining approaches are required both for (a) analysing media content, (b) customizing the data based on individual profiles and on actual context information utilizing value-based (or dual goal) and serial recommender systems, (c) analysing usage patterns, (d) investigating data on personal connections and travel trajectories.

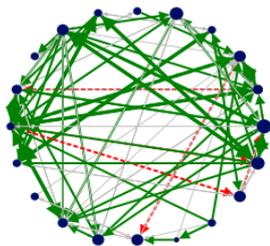


(a) Social network data



(b) Trajectory data on persons' journeys

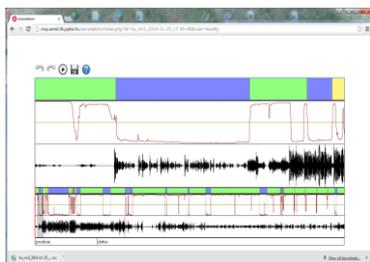

(c) Mixed speech-music playlist

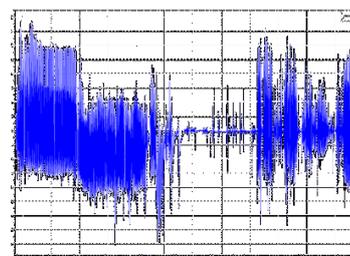

(d) Sensor data

**Fig. 1** *Data sources/forms related to audio media for communities*

PUBLICATIONS:

- [1] M. Jani, G. Lukács, and Gy. Takács, “Experimental Investigation of Transitions for Mixed Speech and Music Playlist Generation,” in *Proceedings of ACM International Conference on Multimedia Retrieval*, Glasgow, United Kingdom, 2014, pp. 392–398.
- [2] M. Jani, Gy. Takács, and G. Lukács, “Evaluation of Speech Music Transitions in Radio Programs Based on Acoustic Features,” in *Proceedings of 11th International Workshop on Content-Based Multimedia Indexing (CBMI)*, Veszprém, Hungary, 2013, pp. 97–102.
- [3] G. Lukács, M. Jani, and Gy. Takács, “Acoustic feature mining for mixed speech and music playlist generation,” in *Proceedings of ELMAR, 2013 55th International Symposium*, 2013, pp. 275–278.
- [4] Pepi Burgos, Mátyás Jani, Catia Cucchiari, Roeland van Hout, and Helmer Strik, “Dutch Vowel Production by Spanish Learners: Duration and Spectral Features,” in *INTERSPEECH-2014*, Singapore, 2014, pp. 529–533.
- [5] G. Lukacs, D. B. Pethesné, and B. Madocsai, “Impact of Personalized Audio Social Media on Social Networks,” in *XXXIII. Sunbelt Social Networks Conference of the International Network for Social Network Analysis Abstract Proceedings*, Hamburg, Germany, 2013, p. 210.

## **JOINT CENTERS WITH THE SEMMELWEIS UNIVERSITY**

**A. HUNGARIAN BIONIC VISION CENTER**

**B. CENTER OF NEUROMODULATION**




## A. HUNGARIAN BIONIC VISION CENTER

*Directors:* KRISTÓF KARACS PHD, Associate Professor; ÁKOS KUSNYERIK PHD

*Advisers:* JÁNOS NÉMETH MD, DSC, Professor, ILDIKÓ SÜVEGES MD, DSC, Professor, BOTOND ROSKA PHD, Head of Laboratory, Friedrich Miescher Institute, Basel, ÁKOS ZARÁNDY DSC, Professor

*Graduate students.* MIHÁLY RADVÁNYI, ATTILA STUBENDEK

The goal of the Hungarian Bionic Vision Center is to restore vision of visually impaired patients to the maximum extent and to improve the quality of their lives through using medical and technological aids. We run programs to study promising medical and engineering technologies under active research.

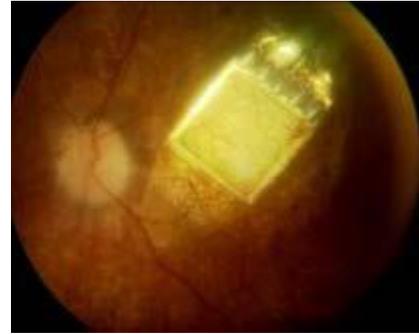

### CURRENTLY ACTIVE PROGRAMS

- I. Research, development and testing of universal electronic devices for visually impaired people
- II. Taking part in international clinical studies for retinal implants and establishing these practices in Hungary (control, preoperative and postoperative follow up)
- III. Optogenetic techniques

The main focus of Program I is the development and testing of the bionic eyeglass in cooperation with organizations representing visually impaired people. In the framework of Program II we mostly deal with subretinal implants. Program III concentrates on the very promising research in optogenetics.

The operation of the center is based on the cooperation between the Dept. of Ophthalmology of the Semmelweis University and the Jedlik Laboratories at the Faculty of Information Technology of the Pázmány Péter Catholic University. The center is scientifically supervised by Prof. János Németh, director of the Dept. of Ophthalmology, and Prof. Tamás Roska, founding dean of the Faculty of Information Technology. We put a strong emphasis on partnership with blind organisations. Our most important partner is the IT for visually impaired foundation.

## REFERENCES

- [1] Á. Kusnyerik, U Greppmaier, R. Wilke, F. Gekeler, B. Wilhelm, H. G. Sachs, K. U. Bartz-Schmidt, U. Klose, K. Stingl, M. D. Resch, A. Hekmat, A. Bruckmann, K. Karacs, J. Németh, I. Süveges, E. Zrenner. Positioning of Electronic Subretinal Implants in Blind Retinitis Pigmentosa Patients Through Multimodal Assessment of Retinal Structures, *Investigative Ophthalmology & Visual Science*, vol. 53, no. 7, pp. 3748–3755, June 2012
- [2] Á. Kusnyerik, M. Resch, T. Roska, K. Karacs, F. Gekeler, R. Wilke, H. Benav, E. Zrenner, I. Süveges, J. Németh. Látásjavító implantátumok látóhártya degenerációkban, *Orvosi Hetilap*, vol. 152, no. 14, pp. 537–545, Apr. 2011
- [3] Z. Solymár, A. Stubendek, M. Radványi, K. Karacs. Banknote Recognition for Visually Impaired, In *Proc. of the 20th European Conference on Circuit Theory and Design (ECCTD 2011)*, Linköping, Sweden, 2011
- [4] Á. Kusnyerik, K. Karacs, Á. Zarándy. Vision Restoration and Vision Chip Technologies, In *Proc. of the European Future Technologies Conference and Exhibition*, Budapest, Hungary, pp. 121–124, May 2011

## **B. CENTER OF NEUROMODULATION**

*Directors:* LORÁND ERŐSS MD, PHD, Associate Professor, neurosurgeon, neurologist, fellow of interventional pain practice; DANIEL BERECZKY MD, PHD, DSC, Professor

*Senior clinicians in the different treatment groups of the center:*

*Epilepsy Surgery Program:* DR. DÁNIEL FABÓ; PROF. DR. PÉTER HALÁSZ; DR. LORÁND ERŐSS

*Pain Program:* DR. EDIT RÁ CZ; DR. LORÁND ERŐSS

*Deep Brain Stimulation Program for movement disorders:* DR. ANNAMÁRIA TAKÁCS; DR. ANITA KAMONDI; DR. MAGDOLNA BOKOR; DR. GERTRÚD TAMÁS; DR. LORÁND ERŐSS

*Intrathecal Drug Delivery Program:* DR. LORÁND ERŐSS; DR. LÁSZLÓ ENTZ

*Psychologists:* DR. NOÉMI CSÁSZÁR; CSABA BORBÉLY

*Psychiatrist:* DR. ÉVA CSIBRI

*Neuromodulation nurses:* KATALIN KIRÁLY; BARBARA KOVÁCS

*Senior researchers:* DR. ISTVÁN ULBERT; DR. GYÖRGY KARMOS; DR. LUCIA WITTNER

*PhD student:* DR. LÁSZLÓ ENTZ

In biotechnological context neuromodulation is a field of science, medicine and bioengineering that encompasses implantable and non-implantable technologies, electrical and chemical with the aim to improve the quality of life for humans suffering from neurological disorders.

The reason of initiation of the first neuromodulation center in Hungary was to create an interdisciplinary hub where clinical medicine, research and medical and infobionic education meets in the field of neuromodulation. In the center, research can have direct influence on medical practice and education on the graduate and postgraduate level in medical school and in information technology.

This will be a place for technology of the neural interface for doctors, bioengineers and the neuromodulation industry.

Our aim is to be a center of excellence in neuromodulation for a broad spectrum of patients with different neurological disorders in Hungary and in the Central European region:

- to support the clinical work of physicians in neuromodulation to create a center of excellence,
- to introduce neuromodulation in the medical and bionic education at graduate level,
- to promote animal research in neuromodulation and clinical investigations in the field of neuromodulation,
- to develop existing and new neuromodulation devices,
- to give the opportunity to join international multicenter clinical trials and initiate external research sites for neuromodulation companies,
- to support incubate spin-off and start-up companies in the field of neuromodulation.


The center was initiated by Loránd Erőss and founded by Professor Tamás Roska from the Pázmány Péter Catholic University and Professor Miklós Réthelyi, Minister of National Resources. The members of the Advisory Board are Gabor Racz the founder of the International Pain Center at Texas Tech University Health Sciences Center, the Dean of the Pázmány Péter Catholic University, Faculty of Information Technology, the Professor of neurology and the Professor of neurosurgery from Semmelweis University. In the supervisory board there are Hungarian and foreign specialists in the field of neuromodulation. The director of the center is Loránd Erőss.

The center incorporate the Pázmány Péter Catholic University, Faculty of Information Technology, the National Institute of Clinical Neurosciences, Functional Neurosurgical Department and the Semmelweis Medical University, Institute of Neurology, Department of Movement Disorders


This is the youngest collaborative center of the Pázmány Péter Catholic University, Faculty of Information Technology. The first research and development project is “Remote telemetrical programming of neuromodulation devices”. The Neuromodulation Center is expanding the remote telemetrical programming of various IPGs and implantable pumps. With help of this new platform and device, the service can be provided regardless the physical location of the patient or the physician. It is important in cases of movement impaired, elderly, or very poor patients who cannot afford to travel for regular clinical controls or in cases of emergencies like pump EOL.

The neuromodulation activity in clinical practice started in 1999 implanting the first ITB pump. 2004 a regular neuromodulation program was introduced and in 2010 the first Functional Neurosurgical Department of Hungary was founded by dr Erőss. In the last 8 years since the neuromodulation program is active in the National Institute of Clinical Neurosciences 120 patient got intrathecal pumps for spasticity and pain, 77 patients went through SCS tests for chronic pain syndromes. The center introduced first in Hungary several new techniques like motor cortex stimulation for thalamic in 2008, and the first Gasserian ganglion stimulator for neuropathic facial pain and a retrograde C1 surgical lead was implanted here for drug resistant atypical facial pain. The Neuromodulation Center is increasing its activity in Deep Brain Stimulation in different movement disorders, since 2004 vagus nerve stimulation and from 2012 DBS in epilepsy.

At present this is the only Neuromodulation Center in Hungary which incorporated a Functional Neurosurgical Department and has a background of bionic research and takes part of the combined graduate and postgraduate medical and bionic education.

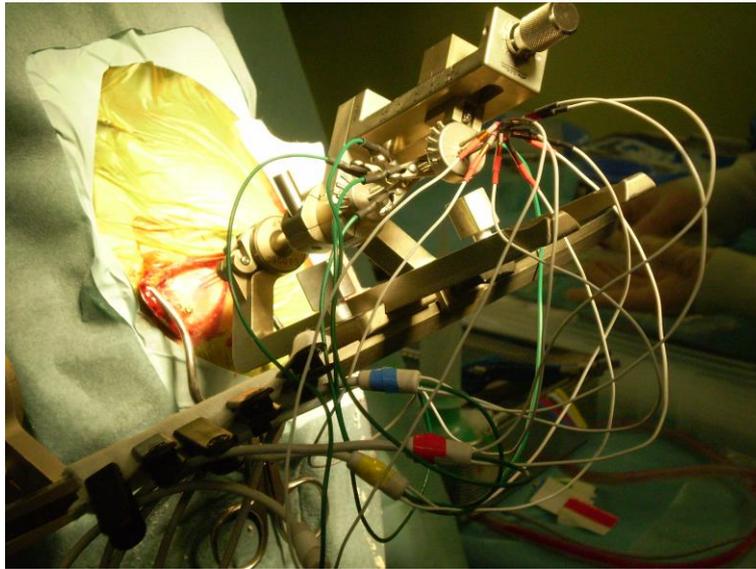

**Fig. 1** *Intraoperative electrophysiological recording, during Deep Brain Stimulator implantation in a Parkinson's disease patient (Institute of Clinical Neurosciences, Budapest)*

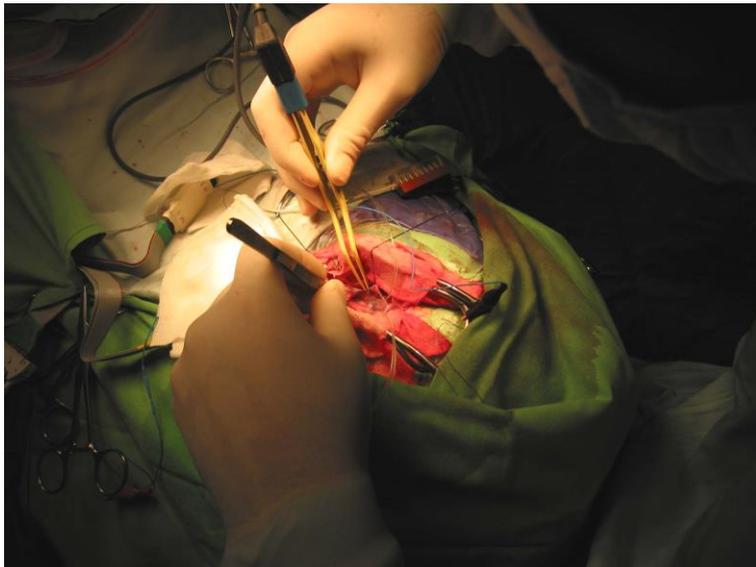

**Fig. 2** *Strip electrode implantation in epilepsy surgery (National Institute of Clinical Neurosciences)*

## PUBLICATIONS

- [1] Eross L, Fekete G, Entz L, Fabó D, Borbély C, Kozak L, Czirják S, Fedorcsák I, Bognár L. The Role of the Intraoperative Electrical Brain Stimulation in Conserving the Speech and Language Functions in Neurosurgical Operations of Awake Patients, *Clin Neurosci. / Ideggyogy Szle* 65;(9-10) 333-341, 2012
- [2] Eross L. The Role of Neuronavigation in the Assessment and Surgical Treatment of Drug-resistant Epilepsy, *Clin Neurosci. / Ideggyogy Szle* 30;64(9-10):333-7. Review. Hungarian, 2011
- [3] Hangya B, Tihanyi BT, Entz L, Fabo D, Eross L, Wittner L, Jakus R, Varga V, Freund TF, Ulbert I. Complex Propagation Patterns Characterize Human Cortical Activity during Slow-Wave Sleep. *Journal of Neuroscience* 31:(24) pp. 8770-8779, 2011
- [4] Csercsa R, Dombovari B, Fabo D, Wittner L, Eross L, Entz L, Solyom A, Rasonyi G, Szucs A, Kelemen A, Jakus R, Juhos V, Grand L, Magony A, Halasz P, Freund TF, Magloczky Z, Cash SS, Papp L, Karmos G, Halgren E, Ulbert I. Laminar analysis of slow wave activity in humans. *Brain* 133:(Pt 9) pp. 2814-2829, 2010
- [5] Cash SS, Halgren E, Dehghani N, Rossetti AO, Thesen T, Wang C, Devinsky O, Kuzniecky R, Doyle W, Madsen JR, Bromfield E, Eross L, Halasz P, Karmos G, Csercsa R, Wittner L, Ulbert I. The human K-complex represents an isolated cortical down-state. *Science* 324:(5930) pp. 1084-1087, 2009
- [6] Eross L., Entz L., Fabo D., Jakus R., Szucs A., Rasonyi G., Kelemen A., Barcs G., Juhos V., Balogh A., Barsi P., Clemens Z., and Halasz P. Interhemispheric propagation of seizures in mesial temporal lobe epilepsy (MTLE): A study with combined scalp and foramen ovale electrodes. *Clin Neurosci. / Ideggyogy Szle*;62(9-10) 319-325, 2009
- [7] Eross L., Bago A.G., Entz L., Fabo D., Halasz P., Balogh A., and Fedorcsak I. Neuronavigation and fluoroscopy-assisted subdural strip electrode positioning: a simple method to increase intraoperative accuracy of strip localization in epilepsy surgery. *J Neurosurg*, 110(2): p. 327-31, 2009

**VARIOUS JOINT RESEARCH PROJECTS WITH THE SEMMELWEIS  
UNIVERSITY**

- I. ON-LINE PERSONALIZED GENETIC ANALYSIS FOR  
TUMORS**
- II. OPTICALLY CONTROLLED SELF ORGANIZING  
AMYLOID NETWORK**
- III. ULTRASOUND IN DERMATOLOGY**
- IV. DIGICON (DIGITAL MEDICAL CONSULTATION)**



## I. ON-LINE PERSONALIZED GENETIC ANALYSIS FOR TUMORS

SÁNDOR PONGOR, Professor; BALÁZS GYÖRFFY, Associate Professor

*Graduate student:* BALÁZS OLÁH

### MEDICAL DATA MINING, DATA-DRIVEN HYPOTHESIS GENERATION IN CANCER RESEARCH

Research in life sciences is only possible today with access to online literature databases. Extracting information useful for medical researchers and practitioners is possible now with the methods of parallel data mining, simultaneously applied to medical publications and molecular databases. Hypothesis generation refers to generating surprising, non-trivial suppositions and explanations based on information extracted from textual resources. From a data-mining perspective, text-based hypothesis generation is a case of link discovery, i.e. a hypothesis can be considered as an undiscovered relation between pre-existing knowledge items. Early success stories include the discovery of therapies for Raynaud's disease and migraine. In the genomics era, hypotheses are often formulated as relations involving molecular entities, such as genes, proteins, drugs, metabolites, etc., so the use of textual resources needs to be combined with molecular databases, and often, with new experimental data generated by the user. A typical example of application is finding undiscovered links and synergisms between approved pharmaceuticals, as drug combinations can reach the applications phase much faster than novel drugs. A promising area is the study of synergisms that may exist between generic and targeted therapeutic agents or the design of cocktail therapies for complex diseases.

The emphasis of current cancer therapy is shifting from traditional chemotherapy to targeted drugs. Such therapies rest on two fundamental motives: i) the use of targeted pharmaceuticals that act on one or a few molecular targets specific to tumor cells, and ii) identification of biomarkers suitable for the prediction of drug response. High throughput technologies provide massive amounts of data that can be processed from many viewpoints; the average research groups however lack the necessary and sometimes very extensive, bioinformatics repertoire. Our aim is to develop on-line facilities that are able to integrate high throughput data with a complex algorithmic procedure that allow identification of biomarkers or statistical targets. An additional goal is to create prediction systems that can help point of care diagnostics applications.

COLLABORATORS:

Dr. Balázs Győrffy, Research Laboratory of Pediatrics and Nephrology, Hungarian Academy of Sciences, Semmelweis University, Budapest, Hungary

Dr. Ingrid Petrič, Centre for Systems and Information Technologies, University of Nova Gorica, Slovenia

PUBLICATIONS

- [1] Ingrid Petrič, Balázs Oláh, Balázs Győrffy and Sándor Pongor. Biomedical Hypothesis Generation by Text Mining and Gene Prioritization. *Protein and Peptide Letters(In Press)*, 2012
- [2] Csermely, P.; Agoston, V.; Pongor, S. The efficiency of multi-target drugs: the network approach might help drug design. *Trends Pharmacol Sci.* 26(4), 178-182, 2005

## II. OPTICALLY CONTROLLED SELF ORGANIZING AMYLOID NETWORK

MIKLÓS KELLERMAYER, Professor; SZABOLCS OSVÁTH, Associate Professor; KRISTÓF IVÁN, Associate Professor

### AMYLOID ARRAY FOR NANOELECTRONIC APPLICATIONS

The general objective of our project is to investigate whether an amyloid-fibril based oriented network can be developed into a nanoelectronic array. The array, with its nanometer-scale dimensions, may, in principle, be utilized for novel electronic applications. Specifically, we plan to 1) develop a microchip (nanoarray) from oriented network of mutant amyloid beta 25-35 (A $\beta$ 25-35) fibrils organized on the surface of mica; 2) transform the amyloid fibrils into conductive nanowires via nano-gold labeling and silver enhancement; 3) assign optically modulated switches in the nanoarray by using recombinant photosynthetic reaction centers; 4) acquire high-resolution, spatially resolved conductivity map of the nanoelectronic array under optical modulation; 5) analyze conductivity data in terms of computational models.

The professional, scientific and economic significance and importance of our project is enormous even by modest estimates. The significance stems on one hand from the particularly advantageous properties of the amyloid nano-network, and on the other hand from the great general interest in the development of nanoelectronic technologies. Because of the structural features of the amyloid network the spatial resolution is truly on the nanometer scale, which represents three orders of magnitude improvement over that of the current microarray technologies and nearly two orders of magnitude improvement over that of current silicon wafer technologies. Our project may lead to the development of novel computational methodologies. In addition, technologies such as super-resolution CCD, direct-readout analytical chips, and computational nanochips may eventually be achieved.

## COLLABORATORS

Arpad Karsai, Department of Neurobiology, Physiology, and Behavior, University of California-Davis, Davis, CA, USA

Maria J. Saraiva, Institute for Molecular and Cell Biology, University of Porto, Porto, Portugal, Instituto de Ciências Biomédicas de Abel Salazar, University of Porto, Porto, Portugal

## PUBLICATONS

- [1] R. H. Pires, Á. Karsai, M. J. Saraiva, A. M. Damas, and M. S. Z. Kellermayer. Distinct Annular Oligomers Captured along the Assembly and Disassembly Pathways of Transthyretin Amyloid Protofibrils, *PLoS ONE*, vol. 7, no. 9, p. e44992, 2012
- [2] M. S. Z. Kellermayer, Á. Karsai, A. Kengyel, A. Nagy, P. Bianco, T. Huber, Á. Kulcsár, C. Niedetzky, R. Proksch, and L. Grama. Spatially and Temporally Synchronized Atomic Force and Total Internal Reflection Fluorescence Microscopy for Imaging and Manipulating Cells and Biomolecules, *Biophysical Journal*, vol. 91, no. 7, pp. 2665–2677, 2006.
- [3] M. S. Z. Kellermayer, Á. Karsai, Ü. Murvai, S. Erdélyi-Bótor, J. Kardos, and R. H. Pires, Single-Molecule Studies of Amyloidogenic Proteins, in *Single-molecule Studies of Proteins*, (A. F. Oberhauser, Ed.) Springer New York, pp. 169–210, 2013

### III. ULTRASOUND IN DERMATOLOGY

SAROLTA KÁRPÁTI, Professor; MIKLÓS GYÖNGY, Associate Professor; KLÁRA SZALAY, Associate Professor

#### GROUP OVERVIEW

The working group is a joint venture between the Ultrasound Bionic Technologies laboratory of the Jedlik Laboratories (see pp. 42) and the Department of Dermatology at Semmelweis University. The group enables an interdisciplinary collaboration between clinical dermatologists with well-established experience in ultrasound-based diagnosis and bionic engineers with the knowledge of ultrasound biophysics. The aim of the group is to help develop an ultrasound imaging platform that can be used by dermatologists and other doctors to help them perform differential diagnosis on skin lesions. Such work has two main aspects, namely the research of appropriate differential diagnosis algorithms and the development of a suitable medical device on which these algorithms may run. These activities are considered in the corresponding sections below.

#### DIFFERENTIAL DIAGNOSIS


Skin lesions come in many forms, from benign nevi to malignant (but rarely fatal) basal cell carcinoma (BCC) to malignant melanoma (MM) – even between these diagnoses, many subtypes and of course stages present themselves, which ultrasound imaging, given suitable expertise, can distinguish between [1]. The aim of our research is to try and represent the knowledge of an expert radiologist in a form that can be algorithmicised to enable computer-aided diagnosis (CAD). Our previous research has shown that quantitative descriptors such as the Nakagami parameter may potentially be used to perform differential diagnosis between MM and BCC melanoma and basal cell carcinoma. However, the performance of the differential diagnosis algorithms is very sensitive to choosing the correct region of interest (ROI) and to low signal to noise ratio (SNR), therefore research is ongoing to find ways to create robust Nakagami estimators.

In finding suitable algorithms to help differential diagnosis, the group took a step back and started looking at semi-quantitative scores of different ultrasound features, as provided by radiologists and medical practitioners of various levels of experience. The question is how these scores correlate with gold standard histology diagnoses. Based on these results, candidate scores may be selected that could be used by medical practitioners without radiology qualifications. Furthermore, the questions arises how the semi-quantitative scores can be translated into fully quantitative parameters (such as the Nakagami parameter) that can be calculated by (semi-)automatically using a computer, potentially enabling use of the differential diagnosis algorithms by non-professionals.

## MEDICAL DEVICE DEVELOPMENT

Although diagnostic ultrasound devices are abundant on the market and are often cost-effective compared to diagnostic imaging modalities, relatively few have the capability to transmit and receive at frequencies high enough (over 15 MHz) for dermatological applications. Moreover, even ultrasound systems or transducers specifically designed for dermatological investigation lack cost-effectiveness, portability and non-expert usability. For this reason, the Ultrasonic Bionic Technologies group of the Jedlik Laboratories (see pp. 42) has undertaken to develop a user-friendly ultrasound device specifically aimed for dermatological applications, with the aim of evaluating its effectiveness within the currently discussed working group.

As a first step in this development, a single element transducer was designed and tested that enables high-resolution ultrasound images to be generated at depths sufficient for dermatological analysis (Figure 1). In collaboration with EVOPRO, we also developed a multi-element imaging platform that enables imaging using an annular array for optimal lateral resolution.

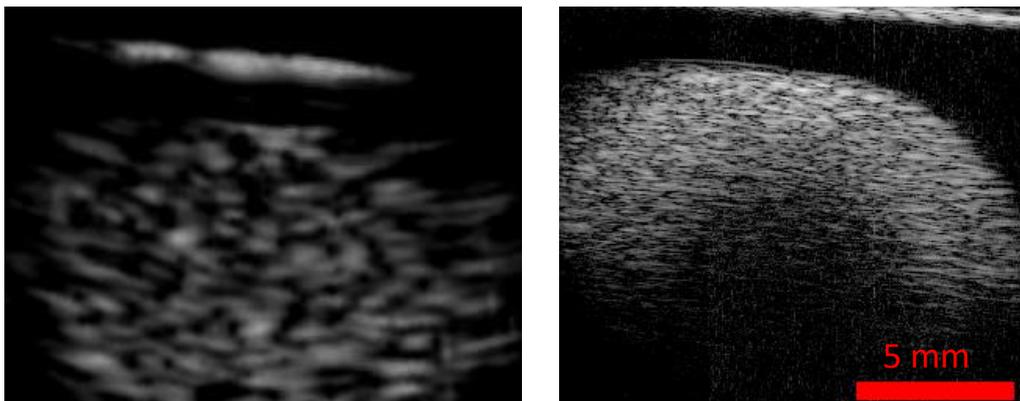

**Fig. 1** Comparison of ultrasound images of an agar-graphite phantom. Left: image taken using commercially available (5 MHz) ultrasound. Right: image taken using high frequency (17 MHz) ultrasound developed by the laboratory. Note the increased resolution at the cost of lower penetration depth. Work with Balázs Bajnok and Marcell Pólik.

## PUBLICATIONS

- [1] K. Szalai, B. Somlai, J. Harsing, Z. Hatvani, S. Kárpáti, G. Botlik, P. Hollo. P26a, Staging melanoma malignum using high resolution technique. *Melanoma Research*, 20, e54, (2010)
- [2] M Gyöngy, L Balogh, K Szalai, I Kallo, Histology-based simulations of ultrasound imaging: methodology, *Ultrasound in Medicine and Biology* 39:(10), 1925-1929 (2013)
- [3] M Gyöngy, K Szalai, D Csaba, Kvantitatív ultrahang diagnosztika a bőrgyógyászatban, *Orvosi Hetilap Konferencia* (2013)
- [4] K. Szalai, Á Simon, D Csabai, M Gyöngy, Ultrasound-based differential diagnosis of skin tumors (in preparation)

## IV. DIGICON (DIGITAL MEDICAL CONSULTATION)

GÁBOR PRÓSZÉKY DSC, Professor, principal investigator; JÁNOS NÉMETH MD DSC, Professor  
*Graduate students:* GYÖRGY OROSZ, BORBÁLA SIKLÓSI, ATTILA NOVÁK, ISTVÁN ENDRÉDY,  
LÁSZLÓ LAKI, BALÁZS INDIG

### SHORT DESCRIPTION OF THE ACTIVITIES

Every day vast amount of clinical documents are gathered in hospitals in different countries containing great amount of valuable hidden information. Although this information is available in textual format, there are a number of pre-processing stages that need to be employed before the valuable data is condensed to a frame-based knowledge for the purpose of automated DDS utilization. Clinical documents likely contain some errors of the following types therefore this pre-processing stage requests robust and complex natural language analysis tools:


- typing errors: these errors occur during text input mainly by accidentally swapping letters, inserting extra letters, or just missing some
- misuse of punctuation marks
- non-standard spelling
- medical terminology errors: These errors arise from non-standard use of special medical language that can be a mixture of the Latin and the local languages (e.g. *tensio/tenzió/tenzio/tensió*).

The result of the pre-processing is a noise-reduced text, which still contains many ambiguities. Basic steps required for a normalized representation are:

- resolving abbreviations
- grammatical annotation (POS tagging, syntactic parsing)
- named entity recognition: doctors, drugs, diseases, dates, scores and measures, treatments and other health concerns
- explore semantic relations (synonyms, lexical semantics, etc.)
- concept matching: mapping variable lexical and surface representations of the same concept to a unique identifier with the use of a knowledge base.

After basic normalization, the resulting expanded data is to be stored in a uniform representation where the units of information are clearly separated. A higher level of structuring analyses the records on the line of each patient's medical history. Since raw texts do not necessarily include information about it, the timeline will be recognized automatically. Both the patient's medical history (describing a patient's run in the medical history) and the history of a certain case is recognized and linked. The resulting structure, an intermediate

ontological representation (as it is shown by the sketch below) will be the same in each language ensuring possible interlingual connection for further processing and unified accessing.

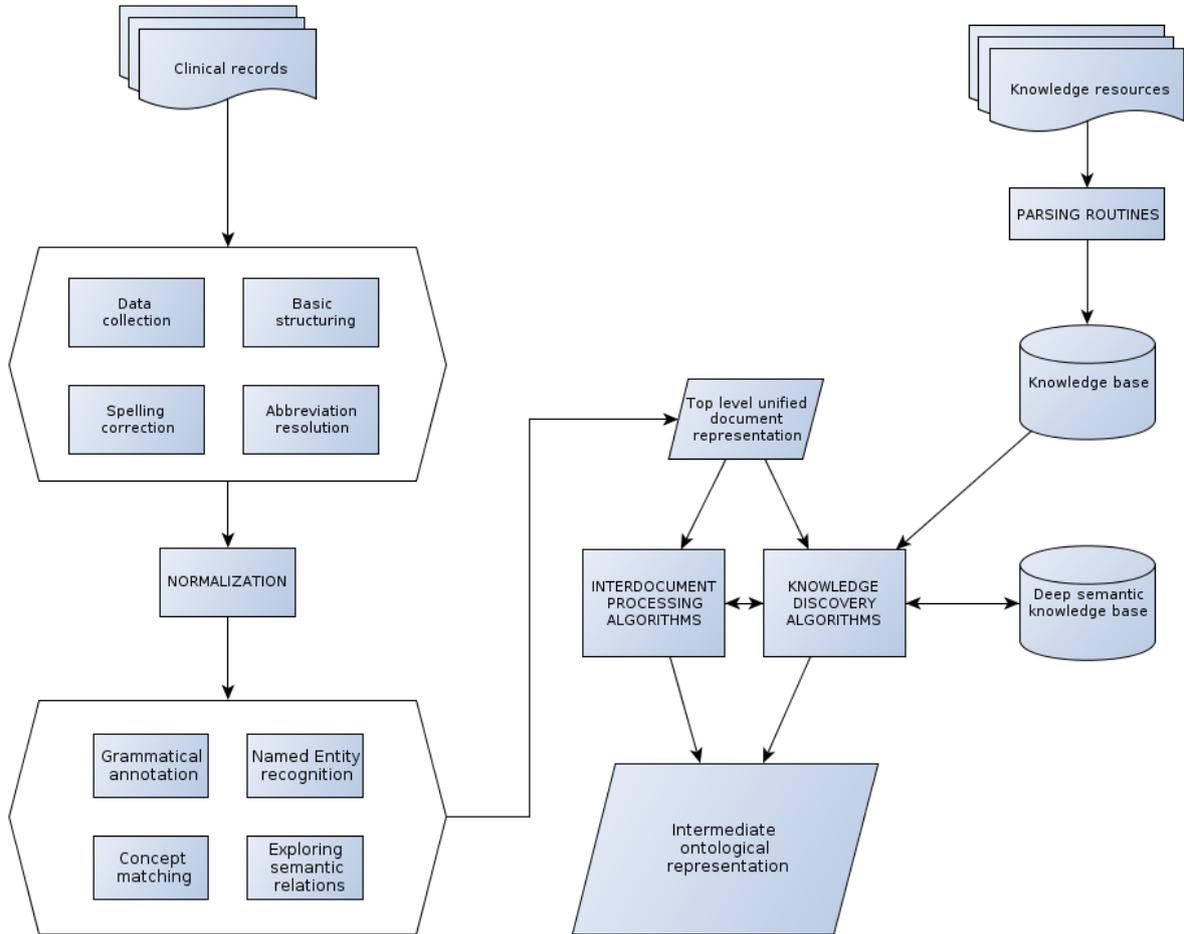

## PUBLICATIONS

- [1] Siklósi Borbála, Novák Attila, Prószéky Gábor. Helyesírási hibák automatikus javítása orvosi szövegekben a szövegkörnyezet figyelembevételével. In: Tanács Attila és Vincze Veronika (szerk.) *IX. Magyar Számítógépes Nyelvészeti Konferencia*. Szeged: Szegedi Tudományegyetem, 148-158, 2013
- [2] Orosz György, Novák Attila, Prószéky Gábor. Magyar nyelvű klinikai rekordok morfológiai egyértelműsítése. In: Tanács Attila és Vincze Veronika (szerk.) *IX. Magyar Számítógépes Nyelvészeti Konferencia*. Szeged: Szegedi Tudományegyetem, 159-169, 2013
- [3] Indig Balázs, Prószéky Gábor. Ismeretlen szavak helyes kezelése kötegelt helyesírás-ellenőrző programmal. In: Tanács Attila és Vincze Veronika (szerk.) *IX. Magyar Számítógépes Nyelvészeti Konferencia*. Szeged: Szegedi Tudományegyetem, 310-317, 2013
- [4] Borbála Siklósi, György Orosz, Attila Novák, Gábor Prószéky. Automatic structuring and correction suggestion system for Hungarian clinical records. In *8th SaLTMiL Workshop on Creation and Use of Basic Lexical Resources for Less-resourced Languages*, pp. 29–34, 2012
- [5] György Orosz, Attila Novák. PurePos – An Open Source Morphological Disambiguator. In *Proceedings of the 9th International Workshop on Natural Language Processing and Cognitive Science*, pp. 53–63, 2012
- [6] Orosz György. PurePos: hatékony morfológiai egyértelműsítő. In *VI. Alkalmazott Nyelvészeti Doktoranduszkonferencia*, 2012
- [7] Novák Attila, Orosz György, Indig Balázs. Javában taggelünk. In: *VIII. Magyar Számítógépes Nyelvészeti Konferencia*, p. 336, 2011
- [8] Siklósi Borbála, Orosz György, Novák Attila. Magyar nyelvű klinikai dokumentumok előfeldolgozása. In: *VIII. Magyar Számítógépes Nyelvészeti Konferencia*, p. 143, 2011
- [9] György Orosz. Investigating Hungarian POS-tagging Methods. In: *Proceedings of the Multidisciplinary Doctoral School, 2010-2011 Academic Year*. Faculty of Information Technology, Pázmány Péter Catholic University, Budapest, pp. 77–80, 2011
- [10] Ferenc Ott. Information-Retrieval from Medical Diagnoses and Anamneses with Text Mining Algorithms. In: *Proceedings of the Multidisciplinary Doctoral School, 2010-2011 Academic Year*. Faculty of Information Technology, Pázmány Péter Catholic University, Budapest, pp. 85–88, 2011
- [11] Orosz György. Egy vertikális nyelvi kereső készítése. In: *VII. Magyar Számítógépes Nyelvészeti Konferencia*, p. 190, 2010